



Commercial Order Desk:

P 613 244 3773

F 613 244 8553

E order@eurotilestone.com

General Inquiries:

P 613 244 4315

F 613 244 4320

E info@eurotilestone.com

3103 Hawthorne Rd | Ottawa, Ontario K1G 3V8

Connect with us on:



<http://eurotilestone.com/>

Machines & Tools for the Professional Tile Installer

This is just a short order form. For **RUBI'S** full line of products, please use the 2019 Catalogue or visit our website.

The RUBI logo is a diamond shape with a red top half and a black bottom half. The word "RUBI" is written in white, bold, sans-serif capital letters across the black section.

RUBI

*Building
Together*




The year 1951 marked a milestone in the Spanish construction industry, when the young Boada brothers invented the professional manual cutter for hydraulic mosaic. This ground-breaking tool, christened with the name of RUBI, served as the stepping stone for developing Germans Boada, S.A. Currently, this multinational company designs, manufactures and distributes best-seller equipment and tools for cutting and laying tiles.

The group headquarters are located in Rubi, near Barcelona, and the logistics and industrial center is established in Santa Oliva (Tarragona). The productive and logistics center, recently expanded to 220.000 Sqf., counts on an automated warehouse and the latest technology in order management. These facilities and resources, combined with optimal inventory management, guarantee a daily service to major markets with tight deadlines, satisfying the current needs multiple distribution channels worldwide. Its international vocation, very present since its creation, makes Germans Boada S.A. a global company with a presence in over 100 countries through an extensive network of branches and participated companies.

In 1999, due to the increasing satisfaction of thousands of tile installers worldwide, RUBI Tools USA opened its doors to the most ambitious and skilled construction professionals in the United States. Strictly committed to its customers and distributors, the company is currently considered the leader manufacturer of tile laying equipment and related building tools in North America.

RUBI Tools USA is heavily investing in the future of the tile industry. The company recognizes that in order to become a top influencer in the construction field, it has to be solidly pledged to the latest technology trends. Accordingly, RUBI Tools USA offers cutting edge tile tools with an unparalleled level of guarantee.

Beyond history, sales or technology, the success of RUBI Tools USA is rooted in a team of specialists and customer representatives who are always ready to face any kind of challenge. The team is also actively participating in the social conversation, monitoring what thousands of tile experts or knowledge seekers have to say about the brand. To stay tuned for the latest updates, events, and offers, visit us on Facebook, Twitter, YouTube and our blog Tiling World.

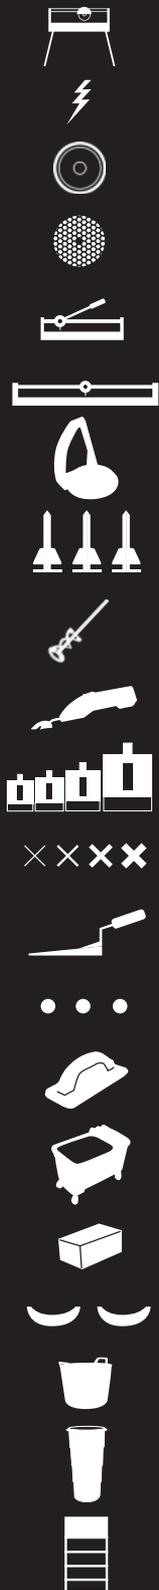

4

Wet Saws

12

Wet Saws Accessories

14

Diamond Blades

17

Polishing Pads

18

Tile Cutters

32

Slab System

36

Suction cups

37

Tile Level Antilippage System

40

Mixers

45

Rubiscraper

42

Drill bits and drilling systems

51

Tile spacers

53

Trowels

55

Accessories

57

Floats

58

Grout Cleaning System

60

Sponges

61

Knee pads

62

Rubber Buckets

64

Rubber Chutes

67

Displays

RUBI Diamant DC-250 ZERO DUST

2
YEARS
WARRANTY



**LONG
LASTING
PAINT**
DC-250 1200



51916		54822	
51914		54999	
54844		54993	
54993		57991	
Ref.	Accessories		
51916	Tile Fixer DV/DC/DS/DX		
54822	Lateral Stop for DW-NL/DC/DS/DX		
51914	Roller Table Extension DV/DW-N/DC/DS/DX (from 2013)		
54844	Adjustable Length Lateral Stop DC/DS/DX		
54999	Laser & Level KIT		
54993	Table Extension DV/DC		
57991	Set of Flanges		



CE EAC



The breaking capacities may vary depending on the position of the head, special flanges and disc diameter.

DC-250 ZERO DUST PRO Grade Bridge Saw.

For Porcelain, Ceramic and Stone Tiles.

- Equipped with ZERO DUST system. Tested and certified by TNO.
- DC-250 1200, chassis with anti-corrosion treatment.
- With adjustable rule (0 to 60°) with lateral stop.
- Plunge effect adjustment allowing adjustment cutting height.
- Single phase direct drive motor, 1.1 kW (1.5 hp) with thermal protector.
- Water pump with Flow control.
- Heavy duty rigid structure.
- Lateral stops for 45° cuts and miter cuts.
- Includes diamond blade Arrowhead Ø 10", Cable included.

			RPM									
DC-250 850 Zero Dust	1	**1	2790	38"	27"	53x23x49"	2 1/2x3 1/2"	3/8"	10"	121 Lb	154 Lb	✓
DC-250 1200 Zero Dust	1	**1	2790	48"	33"	63x23x49"	2 1/2x3 1/2"	3/8"	10"	132 Lb	165 Lb	✓

DC-250 850 Zero Dust	Ref.	54924
	Voltage	120V-60Hz.
DC-250 1200 Zero Dust	Ref.	55948
	Voltage	120V-60Hz.



Ref.	Accessories
51916	Tile Fixer DV/DC/DS/DX
54822	Lateral Stop for DW-NL/DC/DS/DX
51914	Roller Table Extension DV/DW-N/DC/DS/DX (from 2013)
54844	Adjustable Length Lateral Stop DC/DS/DX
54999	Laser & Level KIT
54991	Table Extension DS/DX
57991	Set of Flanges



Ref.	INCLUDED!
31961	VENOM 10"



The breaking capacities may vary depending on the position of the head, special flanges and disc diameter.

DX-250 PLUS Laser&Level ZERO DUST

Heavy Duty 10" Bridge Saw with Plunge cut.

For Porcelain, Ceramic and Stone Tiles.

- Set sliding motor on bearings of high precision and reliability. Perfect finishes.
- Equipped with ZERO DUST system. Tested and certified by TNO.
- High performance plunge effect. Maximum cutting height.
- Aluminium structure. Lighter and maximum resistance to hard working conditions.
- With thermal protection and overcurrent
- Water pump cooling disk with plunge cut.
- Diamond blade Ø 10" included.
- Adjustable head with trimmer effect.
- Cable and blade included.
- 2mW line laser.

			RPM								
DX-250 PLUS 1000 Laser&Level Zero Dust	1	**1	3400	44"	31"x31"	2 3/4"/5 1/2"	3/8"	10"	66 1/16x33 7/8x50 13/16	168 Lb	✓
DX-250 PLUS 1400 Laser&Level Zero Dust	1	**1	3400	60"	42"x42"	2 3/4"/5 1/2"	3/8"	10"	78x33 7/8x50 13/16	192 Lb	✓

DX-250 PLUS 1000 Laser&Level Zero Dust	Ref.	52950
	Voltage	120V-60Hz.
DX-250 PLUS 1400 Laser&Level Zero Dust	Ref.	52951
	Voltage	120V-60Hz.



51916		54822	
51914		54844	
54991		54999	
54991		57991	
Ref.	Accessories		
51916	Tile Fixer DV/DC/DS/DX		
54822	Lateral Stop for DW-NL/DC/DS/DX		
51914	Roller Table Extension DV/DW-N/DC/DS/DX (from 2013)		
54844	Adjustable Length Lateral Stop DC/DS/DX		
54999	Laser & Level KIT		
54991	Table Extension DS/DX		
51915	Set of Flanges		



CE EAC



The breaking capacities may vary depending on the position of the head, special flanges and disc diameter.

DS-250 N Laser & Level ZERO DUST

Mobile head machine for high accuracy, ideal for miter cuts.

For Wall tiles, Floor tiles, Porcelain tiles, Marble, Granite and other materials.

- Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- Equipped with ZERO DUST system. Tested and certified by TNO.
- Wheels and handle included. Easy transport.
- Aluminium structure. Lighter, and maximum resistance to working conditions.
- With thermic and overload security switches.
- Water pump refrigeration of blade with flow control valve.
- With a double set of flanges, one especially designed for miter cuts.
- Motor assembly mounted on sliding bearings for maximum accuracy miter cuts.
- Safety protector for segmented blades.
- 2mW line laser.
- Machine supplied with cable and premium blade.

			RPM									
DS-250 N 1300 Laser & Level Zero Dust	1	**1	3400	52"	37 x37"	2"	1"	10"	78x33	¾x50"	227 Lb	275 Lb
DS-250 N 1500 Laser & Level Zero Dust	1	**1	3400	60"	42 x42"	2"	1"	10"	86	¾x33 ¾x50"	234 Lb	287 Lb

DS-250 N 1300 Laser & Level Zero Dust	Ref.	52934	52936
	Voltage	120V-60 Hz.Inch.	220V-60 Hz.Inch.
DS-250 N 1500 Laser & Level Zero Dust	Ref.	52944	52946
	Voltage	120V-60 Hz.Inch.	220V-60 Hz.Inch.



51916		54822	
51914			
54844		54999	
54991		51915	
Ref.	Accessories		
51916	Tile Fixer DV/DC/DS/DX		
54822	Lateral Stop for DW-NL/DC/DS/DX		
51914	Roller Table Extension DV/DW-N/DC/DS/DX (from 2013)		
54844	Adjustable Length Lateral Stop DC/DS/DX		
54999	Laser & Level KIT		
54991	Table Extension DS/DX		
51915	Set of Flanges DX-350		



CE EAC



The breaking capacities may vary depending on the position of the head, special flanges and disc diameter.

DX-350 N Laser & Level ZERO DUST

Mobile head machine with plunge effect for total versatility.

For all types of ceramic tiles and building materials like; Marble, Granite, Facade bricks, Fireproof bricks, etc...

- Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- Equipped with ZERO DUST system. Tested and certified by TNO
- Aluminium structure. Lighter, and maximum resistance to working conditions.
- High performance plunge effect. Maximum cutting height.
- With thermal and overload security switches.
- Water pump refrigeration of blade with flow control valve.
- Diamond blade Ø 12" (300 mm.) included.
- Allows the use of 12" and 14" blades.
- Adjustable mobile head with plunge effect capability.
- Retractable legs with "shield" function and wheels for easy transportation.
- Motor on top and belt transmission.
- With lateral stop for repetitive cuts.
- 2mW line laser.
- Machine supplied with cable.

DX-350 N 1300 Laser & Level Zero Dust	1	2800	58 1/4"	41 3/8x41 3/8"	4 1/8 / 8 3/8"	1"	11 7/8-13 3/4"	78x33 7/8x56 1/16"	236 Lb
DX-350 N 1300 Laser & Level ZERO DUST	Ref.	52918							
	Voltage	120V-60 Hz.Inch.							



Ref. Accessories
58957 Stand DT EVOLUTION 180



The breaking capacities may vary depending on the position of the head, special flanges and disc diameter.

DT-180 EVOLUTION

7 in. Tile Saw with Stand

For Porcelain, Floor tiles, Wall tiles and other materials.

- Hex wrenches.
- 7 in diamond blade included.
- Cutting wheel wrench.
- Miter guide.
- Table extension.
- Submersible pump.
- Water trays.
- Operator's manual.
- Direct drive motor.
- Plunge and miter cuts.

		RPM									
DT-180 EVOLUTION	1	10	6500	24"	18"	2 1/4"	7/8"	7"	31"x13"x22"	37 Lb	✓

DT-180 EVOLUTION With Stand

Ref.

58974

Voltage

120V AC/ 9 Amps



CE EAC



The breaking capacities may vary depending on the position of the head, special flanges and disc diameter.

DU-200 EVO

Mobile head cutter for renovations and light works.

To cut ceramic and porcelain tiles. Ideal for floor and wall tiles.

- Built-in foldable legs. Very easy to fix.
- With wheels and handle for a more comfortable transport and handling.
- External water tank, easy to handle and clean.
- C³ System, improves blade's cleaning and cooling for a higher performance.
- Motor assembly mounted on sliding bearings and foldable for mitre cuts.
- With lateral stop for repetitive cuts and adjustable square from 0 to 45°.
- Direct drive and reinforced chassis.
- Corrugated tube to protect power cable and water pipe.
- Served with cable and 8" diamond blade type CEV-PRO.
- Equipped with C3 SYSTEM. The most effective cooling and cleaning system for blades. Front blade cooling diffuser with 5 positions depending on the hardness or the abrasion of the material.
- Bi-material handle, better ergonomics.
- Model DU-200 EVO 650: With CEV-PRO type diamond disc Ø 200 mm.
- Model DU-200 EVO 850: With CEV-SUPERPRO diamond disc Ø 200 mm.

	REF			RPM											
DU-200 EVO 650	55907	1	9	3200	25 9/16"	17 11/16x17 11/16"	1 3/8"	3/8"	1" & 5/8"	8"	46 1/16x15 3/8x40 3/16"	51.8 Lb			
DU-200 EVO 850	54976	1	6	3490	33 7/16"	24x24"	1 3/8"	3/8"	1" & 5/8"	8"	53 9/16x15 3/8x40 3/16"	60 Lb			

DU-200 EVO 650	Ref.	55907
	Voltage	120V-60Hz.
DU-200 EVO 850	Ref.	54976
	Voltage	120V-60Hz.



CE EAC



ND-180 SMART

Portable electric cutter.

Ideal for Wall and Floor tiles. Perfect for repairs and renovations.

The breaking capacities may vary depending on the position of the head, special flanges and disc diameter.

- Direct drive SINGLE PHASE motor.
- Wet cut.
- Light for a comfortable work.
- Easy to use.
- Electric cable: 4.9ft (1.5 m).
- Foldable table for mitering cuts.
- Includes: Diamond blade Ø7" (180mm), CEV-PRO type.
- Includes: Lateral stop for repetitive cuts and 45°.

REF				RPM						
ND-180 SMART USA	24977	--	120V-60 Hz.	3600	7 7/8"	1 3/8"	7"	3/8"	15 3/8"x15"x9 3/8"	26 Lb



	Name	Reference	Rip Cut	Diagonal	Blade	Arbor	Plunge cut	HP
	DT-180 EVO	58974	24"	18"	7"	5/8"	Y	1,3 HP
	DU-200 EVO 650	55907	26"	18"	8"	1" & 5/8"	N	1,1 HP
	DU-200 EVO 850	54976	33"	24"	8"	1" & 5/8"	N	1,1 HP
	DC-250 850 ZERO DUST	54924	38"	27"	10"	5/8"	Y	1,5 HP
	DC-250 1200 ZERO DUST	55948	48"	33"	10"	5/8"	Y	1,5 HP
	DX-250 PLUS 1000 ZERO DUST	52950	44"	31"	10"	5/8"	Y	2 HP
	DX-250 PLUS 1400 ZERO DUST	52951	60"	42"	10"	5/8"	Y	2 HP
	DS-250 N 1300 ZERO DUST	52934	52"	37"	10"	1"	N	3 HP
	DS-250 N 1500 ZERO DUST	52944	60"	42"	10"	1"	N	3 HP
	DX-350 N 1300 ZERO DUST	52918	58"	41"	12-14"	1"	Y	3 HP
	ND-180 SMART	24977	∞	∞	7"	5/8"	Y	0,7 HP



Laser & Level Kit DV/DC/DS/DX

- Kit includes:
- Circular bubble level to facilitate proper positioning of the electric cutter.
- Laser Tracer indicating the passage of the disc and facilitates placement of material.
- Laser power: 2 mW
- Laser Class: 2


REF



Laser & Level Kit DV/DC/DS/DX

54999

1



Tile Fixer DV/DC/DS/DX

- Allows the fixing of tiles during cutting, thus avoiding sudden movements.
- Accessory adaptable to DV,DC,DS and DX series (from 2009).

REF



Tile Fixer DV/DC/DS/DX

51916

1



Lateral Stop for DW-NL/DC/DS/DX

- Lateral Stop 19 11/16" (50cm).
- Facilitates positioning of tiles, while reducing the percentage of errors.

REF



Lateral Stop for DW-NL/DC/DS/DX

54822

1



Table Extension

- Increases work surface for large format ceramic tiles. 23 5/8" x 9 1/16" (600x230mm)
- Maximum weight: 22Lb (10kg).
- Available in several models.

REF



Table Extension DS/DX (Since 2013)

54991

1

Table Extension DV/DC

54993

1



Roller Table Extension

- With rollers to simplify movement of the tiles.
- With adjustable foldable legs.
- For DS-250 and DX-350 manufactured before 2013 (ref. 57949).
- Work surface 26 9/16"x22 5/8" (675x575mm) and maximum weight 154lb (70kg).

REF


Roller Table Extension DV/DW-N/DC/DS/DX (from 2013)

51914

1



Set of flanges for mitering cuts.

- Great accuracy when making miters cuts.
- Available in several models.

REF


Set of flanges DW/DV/DC/DX-250

57991

1

Set of flanges DX-350

51915

1



Adjustable length Lateral Stop DC/DS/DX

- For fixing large format tiles.
- Adjustable to the maximum length of electric cutter.
- Ceramic tile blocks laterally thus avoiding any movement.
- Especially suitable for blocking and execution of repetitive miter.

REF


Adjustable Length Lateral Stop DC/DS/DX

54844

1



quality 5.0 ★★★★★
speed 4.5 ★★★★★

Premium VIPER DRY

- Recommended blade for cutting hard materials such as granite, rustic tiles, clinker, refractory, slate and porcelain tile.
- The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.
- 5/8" ring adapter included.
- Thicker center to avoid vibrations and wobbling.

REF	Box	Ø	Ø	Ø	Ø
VIPER DRY 4" USA	31926	1	4"	5/8" & 7/8"	1/16" 3/8"
VIPER DRY 4 1/2" USA	31927	1	4 1/2"	5/8" & 7/8"	1/16" 3/8"
VIPER DRY 5" USA	31949	1	5"	5/8" & 7/8"	1/16" 3/8"



quality 5.0 ★★★★★
speed 4.5 ★★★★★

Premium VIPER WET

- Recommended blade for cutting hard materials such as granite, rustic tiles, clinker, refractory, slate and porcelain tile.
- The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.
- 5/8" ring adapter included.
- Thicker center to avoid vibrations and wobbling.

REF	Box	Ø	Ø	Ø	Ø
VIPER WET 7" USA	31929	1	7"	5/8" & 7/8"	1/16" 3/8"
VIPER WET 8" USA	31940	1	8"	5/8" & 1"	1/16" 3/8"
VIPER WET 10" USA	31941	1	10"	5/8" & 1"	1/16" 3/8"
VIPER WET 12" USA	31946	1	12"	1"	1/16" 3/8"
VIPER WET 14" USA	31947	1	14"	1"	1/8" 3/8"



quality 5.0 ★★★★★
speed 5.0 ★★★★★

Premium VENOM DRY

- Recommended blade to cut Porcelain, Ceramic, Marble, Granite, Natural Stone.
- 5/8" ring adapter included.

REF	Box	Ø	Ø	Ø	Ø
Venom DRY 4" USA	31950	1	4"	5/8" & 7/8"	1/16" 1/4"
Venom DRY 4 1/2" USA	31951	1	4 1/2"	5/8" & 7/8"	1/16" 1/4"



quality 5.0 ★★★★★
speed 4.5 ★★★★★
ref.31960

quality 5.0 ★★★★★
speed 5.0 ★★★★★
ref.31961

Premium VENOM WET

- Recommended blade to cut Porcelain, Ceramic, Glass, Marble, Granite, Natural Stone.
- 5/8" ring adapter included.
- Thicker center to avoid vibrations and wobbling.

REF	Box	Ø	Ø	Ø	Ø
Venom WET 7" USA	31960	1	7"	5/8" & 7/8"	1/16" 1/4"
Venom WET 10" USA	31961	1	10"	5/8" & 1"	1/16" 3/8"



quality 4.0 ★★★★★
speed 4.0 ★★★★★

Premium ARROWHEAD

- Recommended blade to cut fine porcelain tiles.
- High Tech. High speed.

	REF						
Arrowhead Wet & Dry TURBO 4 1/2"	31916	1	4 1/2"	5/8" & 7/8"	1/8"	1/4"	
ARROWHEAD 7"	31901	1	7"	5/8"	1/8"	1/4"	
ARROWHEAD 10"	31900	1	10"	5/8"	1/8"	1/4"	

quality 4.0 ★★★★★
speed 4.0 ★★★★★
ref.31994 / 31998

quality 5.0 ★★★★★
speed 3.0 ★★★★★
ref.31999

Glass

- Recommended blade to cut Glass mosaic, glass blocks and other glass materials.
- High quality finish at low speed.

	REF						
GLASS WET 7"	31994	1	7"	5/8" & 7/8"	1/16"	1/4"	
GLASS WET 8"	31998	1	8"	5/8" & 1"	1/16"	5/16"	
GLASS WET 10"	31999	1	10"	5/8" & 1"	1/16"	5/16"	

Glass

- Recommended blade to cut glass.

	REF						
Glass 7"	31920	1	7"	5/8"	1/8"	1/4"	
Glass 10"	31919	1	10"	5/8"	1/8"	1/4"	

Porcelain

- Recommended blade to cut fine porcelain tiles.
- High Tech. High speed on porcelain tiles.

	REF						
Porcelain Wet & Dry 4 1/2"	31914	1	4 1/2"	5/8" & 7/8"	1/8"	1/4"	
Wet & Dry 4 1/2" Super Pro	31913	1	4 1/2"	5/8" & 7/8"	1/8"	1/4"	
Porcelain 7"	31912	1	7"	5/8"	1/8"	1/4"	
Porcelain 10"	31907	1	10"	5/8"	1/8"	1/4"	



Natural Stone

- Recommended blade to cut fine natural stone.
- High Tech. High speed on natural stone.

	REF					
Natural Stone 7"	31918	1	7"	5/8"	1/8"	1/4"
Natural Stone 10"	31917	1	10"	5/8"	1/8"	1/4"



Diamond cutting and grinding blade
For porcelain, granite and marble.

	REF		
Diamond Blade ECD 2IN1 4 1/2"	31976	1	5/8"
Diamond Blade ECD 2IN1 5"	31977	1	5/8"



Stone cup wheel

- Perfect for buffing work on any type of natural stone, especially granite and marble, and cured concrete surfaces.

	REF		
Stone cup wheel	31921	1	5"



Grinding Blades

- VACUUM BRAZED embossed plate.
- For edges and surfaces grinding of natural stone, all kind of ceramic tiles and paint or resin coatings.
- For GRINDERS use.
- Maximum recommended speed: 15,300 RPM.

	REF			
VDF 100 FINE PRO	31974	1	4"	7/8"
VDG 100 COARSE PRO	31979	1	4"	7/8"



Cleaning block

- For cleaning of diamond blades.
- Made of corindon with a #100 grit.

	REF	
Cleaning block	05973	5



N-Cleaning Block

- Specifically designed to bring back the diamonds on the rim of diamond blades when cutting porcelain.
- Made of silicon carbide with a #20 grit.

	REF	
N-Cleaning Block	05974	5



Polishing Pads

- Resin polishing pads.
- 8 DRY polishing pads.
- Premium cooling technology on both versions (Dry & Wet).
- Will remove scratches from all Natural Stones.


	REF	
Resin Dry Polishing Pad 50 grit 4"	61911	1
Resin Dry Polishing Pad 100 grit 4"	61913	1
Resin Dry Polishing Pad 200 grit 4"	61915	1
Resin Dry Polishing Pad 400 grit 4"	61931	1
Resin Dry Polishing Pad 800 grit 4"	61932	1
Resin Dry Polishing Pad 1500 grit 4"	61933	1
Resin Dry Polishing Pad 3000 grit 4"	61940	1
Resin Dry Polishing Pad final buff 4" (white)	61973	1



Polishing Pads

- Resin polishing pads.
- 8 WET polishing pads.
- Premium cooling technology on both versions (Dry & Wet).
- Will remove scratches from all Natural Stones.

	REF	
Resin Wet Polishing Pad 50 grit 4"	61942	1
Resin Wet Polishing Pad 100 grit 4"	61945	1
Resin Wet Polishing Pad 200 grit 4"	61957	1
Resin Wet Polishing Pad 400 grit 4"	61958	1
Resin Wet Polishing Pad 800 grit 4"	61959	1
Resin Wet Polishing Pad 1500 grit 4"	61961	1
Resin Wet Polishing Pad 3000 grit 4"	61964	1
Resin Wet Polishing Pad final buff 4" (white)	61971	1



Manual diamond polishing pads

Range of diamond rubber pads for roughing and edge polishing, cutting and surfaces of natural stone and ceramic tile.

	REF	
Manual diamond polishing pad - Grit #60	61974	10
Manual diamond polishing pad - Grit #120	61975	10
Manual diamond polishing pad - Grit #200	61976	10
Manual diamond polishing pad - Grit #400	61977	10



Back up pad

- The polishing pads are fixed to the holder by VELCRO. The holder provides solid and secure fixing of the whole polishing pad surface.

	REF	
Back up pad	61934	1


WARRANTY
WWW.RUBI.COM


Ref.	Accessories
18980	Maintenance Kit



TZ

Maximum power, the most advanced manual cutter in the market.

For intensive cutting of all types of ceramic and porcelain tiles.

- Powerful breaking system up to 3307Lb (1.500 kg), operable with just one hand.
- Accurate with soft slider movements.
- Large cutting capacity, up to 21mm thickness. Ideal for large format tiles*.
- Robust with a foldable structure for high strength and easy transportation.
- Excellent performance breaking system: Clean cuts with soft motion.
- Robust chassis, guides and breaking system.
- Swivel square with central pivot for fast and accurate measurements in angle cutting.
- Adjustable lateral stop for repetitive cuts.
- Support base for excellent tile placement.
- Easy to transport: rubber wheels with bearings and handle.
- Interchangeable scoring wheels ranging from Ø 8mm -22mm.
- Includes Ø 8mm and 22mm EXTREME scoring wheels. Reinforced textile bag for transport and protection.

REF									
TZ-850	17956	1	8	√	33 7/16"	24x24"	1/8-7/8"	3307 Lb	49,38 Lb
TZ-1020	17955	1	8	√	40 3/16"	27 1/16x27 1/16"	1/8-7/8"	3307 Lb	54,23 Lb
TZ-1300	17957	1	8	√	51 3/16"	35 7/16x35 3/16"	1/8-7/8"	3307 Lb	66,14 Lb
TZ-1550	17958	1	8	√	61 1/16"	43 3/16x43 3/16"	1/8-7/8"	3307 Lb	72,75 Lb



Ref.	Accessories
18980	Maintenance Kit



TX-MAX

Professional manual cutter with high-performance multipoint breaker.


For professional cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.

- Highly precise scoring.
- Entire system highly efficient.
- Reinforced components. Heavy duty.
- High breaking power (1,200 kg) - MASTER POWER. One-handed operation.
- Head with extra-long aluminium sliders with "self-lubricating" friction bushings.
- Portable breaker with aluminium pressure pad, equipped with plastic protector to avoid marking delicate surfaces. Better visibility of the scoring and cutting zone.
- The pressure pad is locked by a ratchet mechanism and is unlocked by the trigger, allowing one-handed scoring and breaking. Faster use. Increases performance with both thin and thick materials.
- Injected-aluminium base, reinforced with a central rib, for increased strength.
- Floating tables and supplementary arms for large-size ceramic tile, increases cutting stability.
- Rotating square, with central pivot point and lateral end stop. Greater precision in angle cuts.
- Handle with soft grip for better ergonomics and comfort.
- Equipped with 8 mm and 22 mm EXTREME scoring wheels. Compatible with the entire plus line of scoring wheels.
- Includes a carrying case (the 1250 model is equipped with wheels to transport the machine).

	REF									
TX-710 MAX	17910	1	10	✓	28"	20x20"	1/8-13/16"	2646 Lb	29.3 Lb	
TX-1020 MAX	17916	1	10	✓	40 3/8"	27 3/8"	1/8-13/16"	2646 Lb	42.8 Lb	
TX-1250 MAX	17922	1	10	✓	49 3/8"	33 3/8"	1/8-13/16"	2646 Lb	57 Lb	



Ref.	Accessories
18980	Maintenance kit




TX-N

Robust and accurate cutter with a angular measurement system, specially suitable for cutting hard materials.

For intensive cutting of ceramic tiles, ideal for porcelain tiles and extruded tiles.

- 1.000Kg power breaker, for cutting hardest materials.
- Central pivot swivel square for quick and accurate measurement of angular cuts.
- Double set of guides for greater visibility and flexion resistance.
- Adaptable scoring wheels to every material to maximize performance and cutting quality.
- Reinforced breaking feet.
- For large ceramic formats.
- Quick clamping system of the square.
- Lateral stop for repetitive cuts.
- Two-layer base with shock absorption effect.
- Aluminum base of high strength.
- Carrying case of greater resistance.
- Scoring wheel included $\varnothing 5/16''$ (8 mm) & $\varnothing 3/4''$ (18 mm).

REF									
TX-700 N	17975	1	12	28"	20"	¼-¾"	2.205 Lb	✓	46.3 Lb
TX-900 N	17976	1	10	36"	24"	¼-¾"	2.205 Lb	✓	52.9 Lb
TX-1200 N	17977	1	10	50"	36"	¼-¾"	2.205 Lb	✓	73.9 Lb



Ref.	Accessories
18980	Maintenance Kit


TR-MAGNET

Suitable for diagonal cuts with a revolving square for high accuracy.

For intensive cutting of ceramic, wall tiles, floor tiles and stoneware.

- Fast operating system with magnet, for one handed use.
- Reinforced operating material. Increased breaking power.
- Revolving square with central pivot for fast and accurate measurements for cutting angles.
- Floating base with shock absorber for better tile breaking.
- Solid steel guides- chromed and rectified, with anti corrosion treatment for greater resistance to bending.
- Multi point breaker with 1.764Lb (800 kg) power.
- Reinforced SOFT-GRIP handle.
- Lateral stop for repetitive cuts.
- Supplement base for large formats.
- Basecoat with damping effect
- High-strength aluminum base.
- Interchangeable scoring wheels available between Ø 6mm -22mm.
- Ø 6mm and 10mm scoring wheels and bag-case included.

	REF								
TR-600 MAGNET	17907	2	18	✓	24"	17x17"	3/8-9/16"	1764 Lb	31 Lb
TR-710 MAGNET	17908	1	15	✓	28"	20x20"	3/8-9/16"	1764 Lb	34 Lb



Ref.	Accessories
18980	Maintenance Kit

TS-MAX

Authentic & Original: Lightweight and functional with high performance breaker.

For intensive cutting of ceramic and porcelain tiles.

- Progressive breaking system "SMART POWER" adapts to different material hardness.
- Wide base. Greater base surface for higher stability and cutting quality.
- Reinforced components for heavy duty work. High durability.
- Ergonomic handles. Maximum comfort.
- Bigger reinforced base for a higher comfort and better stability when cutting.
- Powerful single point breaker. Up to 1.764Lb (800 kg) breaking pressure.
- Double guide for direct view of scoring/cutting line.
- Chromed steel guides, rectified and calibrated, with anti-rust treatment.
- Lateral stop for repetitive straight and 45° cuts.
- Interchangeable scoring wheels ranging from Ø 6mm to 22 mm.
- Includes Ø 6mm and 10 mm scoring wheels and a transport case with reinforced locks and hinges.

	REF								
TS-43 MAX (Grey)	18972	1	24	✓	17"	12x12"	¼-9/16"	1764 Lb	19.4 Lb
TS-57 MAX (Grey)	18973	1	24	✓	22"	16x16"	¼-9/16"	1764 Lb	21.8 Lb
TS-66 MAX (Grey)	18974	1	20	✓	26"	18 ½x18 ½"	¼-9/16"	1764 Lb	29.5 Lb
TS-75 MAX (Grey)	18975	1	20	✓	29 ½"	20 ¾x20 ¾"	¼-9/16"	1764 Lb	33.3 Lb



TQ-66
TQ-75

TQ-1020



Ref.	Accessories
18980	Maintenance Kit




TQ

Single-guide manual cutter with multipoint breaker and swivel square for higher accuracy in angle cuts.

For frequent use on porcelain tiles and intensive use on floor stoneware and wall tiles.

- Chromed steel trapezoidal-shaped guide.
- Single-guide head with 6 self-adjustable ball bearings that improves scoring.
- Mobile breaker equipped with magnet system for one handed use. Faster use.
- Swivel square with central pivot. More accurate angle cuts.
- Improves visibility when scoring and cutting.
- Injected aluminium base for a higher robustness.
- With lateral stop for repetitive cuts and narrow ribs.
- Equipped with aluminium made support base, for large tiles.
- Soft-grip handle for a higher ergonomics and comfort.
- Includes Ø22mm Extreme scoring wheel. For rough and structured tiles.
- Compatible with Ø22mm scoring wheel (ref. 18914) for smooth surface tiles.

	REF								
TQ-66 26"	14997	1	24	26"	18 1/8x18 1/8"	3/16-3/16"	1764 Lb	26 Lb	
TQ-75 29"	14998	1	24	29 1/2"	20 7/8x20 7/8"	3/16-3/16"	1764 Lb	28 Lb	
TQ-1020 40"	14999	1	24	40 3/16"	27 1/16x27 1/16"	3/16-3/16"	1764 Lb	37 Lb	



Ref.	Accessories
18980	Maintenance kit

* There are some ceramic materials over 9/16" (15mm) thick which, due to their physical properties, possible inner or surface tensions, are difficult to cut manually. It is recommended to make some sample cuts to determine the compatibility of the product.


TP-S PUSH

Single guide with multipoint separator and angular measurement.

For high quality cutting of ceramics, also ideal for porcelain tiles.

- Guide system highly resistant to impacts resulting in longer product life.
- Ergonomic handle with incorporated separator for greater speed and ease of use.
- Swivel bracket with central pivot for fast and accurate measurements.
- Long-lasting laser engraved square.
- Reinforced breaking feet
- Lateral stop for accurate repetitive cuts.
- Basecoat with damp-proof effect.
- Support base for large formats.
- Carrying handle. (TP-66-S and TP-75-S).
- Designed for 'pushing' the handle to use.
- RUBIFLEX ergonomic handle.
- Thickness adjustment system with 3 positions (6-9 mm./9-12 mm./12-20 mm.), Fast and accurate
- Ø 7/8"(22mm) EXTREME scoring wheel included. (Ref. 01901).

	REF							
TP-66 S	12914	1	12	26"	18 1/8"	3/16-13/16"	2205 Lb	25.4 Lb
TP-75 S	12928	1	12	29 1/2"	20 7/8"	3/16-13/16"	2205 Lb	26 Lb
TP-102 S	11902	1	-	40 3/8"	27 9/16"	3/16-13/16"	2205 Lb	-
TP-125 S	11975	1	-	49 3/8"	33 7/16"	3/16-13/16"	2205 Lb	-



Ref.	Accessories
18980	Maintenance kit

* There are some ceramic materials over 9/16" (15mm) thick which, due to their physical properties, possible inner or surface tensions, are difficult to cut manually. It is recommended to make some sample cuts to determine the compatibility of the product.


TP-T PULL

Single guide with multipoint separator and angular measurement.

For high quality cutting of ceramics, also ideal for porcelain tiles.

- Guide system highly resistant to impacts resulting in longer product life.
- Ergonomic handle with incorporated separator for greater speed and ease of use.
- Swivel bracket with central pivot for fast and accurate measurements.
- Thickness adjustment system with 3 positions (6-9 mm./9-12 mm./12-20 mm.), fast and accurate.
- Long-lasting laser engraved square.
- Reinforced breaking feet
- Lateral stop for accurate repetitive cuts.
- Basecoat with damp-proof effect.
- Support base for large formats.
- Carrying handle. (TP-66-T and TP-75-T).
- Designed for 'pulling' the handle to use.
- RUBIFLEX ergonomic handle.
- Ø 7/8" (22mm) EXTREME scoring wheel included. (Ref. 01901)

	REF								
TP-66 T	12917	1	12	26"	18 1/8"	3/16-13/16"	2.205 Lb	23.15 Lb	
TP-75 T	12929	1	12	29 1/2"	20 7/8"	3/16-13/16"	2.205 Lb	24.25 Lb	
TP-102 T	11903	1	-	40 3/16"	27 3/16"	3/16-13/16"	2.205 Lb	-	



Ref.	Accessories
18980	Maintenance Kit


SPEED-MAGNET

For the most demanding tiling projects.

For frequent cutting of all types of tiles.

- Quick speed system with magnet, ideal for one-handed use. Easy and fast to use.
- Great visibility during scoring.
- Reinforced structured elements. High breaking power.
- Aluminum base for robustness. Light and easy to transport.
- Solid 20mm steel guides. Chromed and rectified with anti-corrosion treatment for greater resistance to twisting.
- Multipoint breaker 1.764Lb (800 kg) power.
- Reinforced SOFT-GRIP handle.
- Lateral stop for repetitive cuts and 45 degrees square.
- Interchangeable scoring wheels ranging between Ø 6mm-22mm.
- Scoring wheel Ø 8 mm. included.
- Direct view of scoring and cutting line.
- Ideal for glass tiles due to its rubber base.
- 72/92 models:
 - Aluminum lateral support and bigger breaker system.

	REF							
SPEED-62 MAGNET with case	14988	2	√	24"	18"	1/16"	1764 Lb	25.4 Lb
SPEED-72 MAGNET with case	14989	2	√	28"	20"	1/16"	1764 Lb	30 Lb
SPEED-92 MAGNET with case	14990	2	√	36"	25"	1/16"	1764 Lb	37 Lb



Ref.	Accessories
18980	Maintenance Kit

SPEED-N

The most versatile tile cutter in it's range.


For frequent cutting of glazed stoneware, wall tiles or occasional cuts of porcelain tiles.

- Reinforced structured elements. High breaking power.
- Chromed and rectified steel guides, with anticorrosion treatment. Higher durability.
- Aluminum base for higher robustness.
- Light and easy to transport.
- With lateral stop for repetitive cuts and 45 degree squares.
- Interchangeable scoring wheels ranging between Ø 6mm to 10mm.
- Direct vision of scoring and cutting line.
- Ideal for glass tiles due to its rubber base.
- 72/92 models;
- Aluminum lateral support.

	REF						
SPEED 42-N without case	14949	2	-	17"	12x12"	3/16-1/16"	12 Lb
SPEED-62 N with case	14985	2	✓	24"	18x18"	3/16-1/16"	23 Lb
SPEED-72 N with case	14986	2	✓	28"	20x20"	3/16-1/16"	28 Lb
SPEED-92 N with case	14987	2	✓	36"	25x25"	3/16-1/16"	35 Lb

Table Professional Tile Cutters Characteristics

	Name	Reference	Rip Cut	Diagonal Cut	Thickness cut
	TZ	17956	33 $\frac{7}{16}$ "	24"	$\frac{1}{8}$ "- $1\frac{3}{16}$ "
		17955	40 $\frac{3}{16}$ "	27 $\frac{9}{16}$ "	
		17957	51 $\frac{3}{16}$ "	35 $\frac{3}{16}$ "	
		17958	61 $\frac{1}{16}$ "	43 $\frac{3}{16}$ "	
	TX-MAX	17910	27 $1\frac{1}{16}$ "	20"	$\frac{1}{8}$ "- $1\frac{3}{16}$ "
		17916	40 $\frac{3}{16}$ "	27 $\frac{9}{16}$ "	
		17922	49 $\frac{3}{16}$ "	33 $\frac{3}{16}$ "	
	TX-N	17975	28"	20"	$\frac{1}{4}$ "- $\frac{7}{8}$ "
		17976	36"	24"	
		17977	50"	36"	
	TR-MAGNET	17907	24"	17"	$\frac{1}{8}$ "- $\frac{9}{16}$ "
		17908	28"	20"	
	TS-MAX	18972	17"	12"	$\frac{1}{8}$ "- $1\frac{3}{16}$ "
		18973	22"	16"	
		18974	26"	18 $\frac{1}{2}$ "	
		18975	29 $\frac{1}{2}$ "	20 $\frac{3}{8}$ "	
	TQ	14997	26"	18 $\frac{1}{8}$ "	$\frac{3}{16}$ "- $1\frac{3}{16}$ "
		14998	29 $\frac{1}{2}$ "	20 $\frac{3}{8}$ "	
		14999	36 $\frac{3}{8}$ "	25 $\frac{3}{8}$ "	
	TP-T (PULL)	12917	26"	18 $\frac{1}{8}$ "	$\frac{3}{16}$ "- $1\frac{3}{16}$ "
		12929	29 $\frac{1}{2}$ "	20 $\frac{3}{8}$ "	
		11903	40 $\frac{3}{16}$ "	27 $\frac{9}{16}$ "	
	TP-S (PUSH)	12914	26"	18 $\frac{1}{8}$ "	$\frac{3}{16}$ "- $1\frac{3}{16}$ "
		12928	29 $\frac{1}{2}$ "	20 $\frac{3}{8}$ "	
		11902	40 $\frac{3}{16}$ "	27 $\frac{9}{16}$ "	
		11975	49 $\frac{3}{16}$ "	33 $\frac{3}{16}$ "	
	SPEED-MAGNET	14988	24"	18"	$\frac{1}{8}$ "- $\frac{9}{16}$ "
		14989	28"	20"	
		14990	36"	25"	
	SPEED-N	14985	24"	18"	$\frac{3}{16}$ "- $\frac{9}{16}$ "
		14986	28"	20"	
		14987	36"	25"	



Ref.	Accessories
18980	Maintenance Kit

FAST
Light and versatile cutter.
 For cutting ceramic tiles.

- Extruded aluminum base.
- New rigid and stable separator.
- Reinforced 18mm guides for greater resilience.
- Four side brackets for a great additional clamping.
- Wider foam base.
- Chromed steel guides with anti-rust treatment.
- Lateral stop with 45° square.
- Base for greater support of the tile.
- Interchangeable scoring wheels from Ø1/4" (6mm) to 13/32" (10mm).
- Ø1/4" (6mm) scoring wheel included.
- Two-layer base with shock absorption.
- Direct view of the scoring and cutting line.

REF										
FAST-65	13940	4	48	-	25 1/16"	17 13/16x17 13/16"	1/2"	13.9 Lb	15.4 Lb	
FAST-85	13941	2	32	-	33 1/16"	24x24"	1/2"	16.5 Lb	18.7 Lb	



Ref.	Accessories
18980	Maintenance Kit

STAR-MAX

Light and versatile cutter.

For cutting ceramic tile.

- Powerful separation because of the new design.
- New support reinforced for durability and powerful separation.
- Reinforced support guides for extra strength
- Ergonomic comfort handle.
- Chromed steel guides with anti-rust treatment.
- Lateral stop with 45° square.
- Base for correct support of the tile.
- Interchangeable scoring wheels from $\varnothing 1/4"$ (6mm) to $13/32"$ (10mm).
- $\varnothing 1/4"$ (6mm) scoring wheel included.
- Two-layer base with shock absorption.
- Direct view of the scoring and cutting line.

	REF								
STAR-51 MAX With Bag	13937	6	72	20 $\frac{1}{16}"$	14 $\frac{3}{16}" \times 14 \frac{3}{16}"$	$\frac{1}{2}"$	9.26 Lb	10.25 Lb	✓
STAR 65 MAX With Bag	13938	6	72	25 $\frac{1}{16}"$	17 $\frac{13}{16}" \times 17 \frac{13}{16}"$	$\frac{1}{2}"$	11.7 Lb	12.8 Lb	✓

TEN BRIC

Ideal for Mosaics.

For cutting Floor and Wall tiles.

- Nippers with breaker & wheel . • Includes $\varnothing 9/16"$ (14mm) scoring wheel. (Ref. 01960)



	REF				
TEN-BRIC	05975	5	680	$\frac{3}{8}"$ 10 mm	0.4 Lb 0.2 kg

- ☆☆☆ Alternative Use
- ☆☆☆ Second best use
- ☆☆☆ Ideal use

SCORING WHEEL CHARACTERISTICS

The norm UNE-EN 14411 applies to ceramic & tile classification and it is of international application. It is indicated on all tile boxes.

CEMENT TILES	A1 A1a A1b A1c
PORCELAIN	B1a
FLOOR TILES	B11b B1a
WALL TILES	B11

	6 mm 1/4 inch	8 mm 5/16 inch	10 mm 13/32 inch	18 mm 3/4 inch
Cement Tiles	☆☆☆☆	☆☆☆☆	☆☆☆☆	☆☆☆☆
Porcelain	☆☆☆☆	☆☆☆☆	☆☆☆☆	☆☆☆☆
Floor Tiles	☆☆☆☆	☆☆☆☆	☆☆☆☆	☆☆☆☆
Wall Tiles	☆☆☆☆	☆☆☆☆	☆☆☆☆	☆☆☆☆

	22 mm 7/8 inch
Smooth Surface	TUNGSTEN CARBIDE GOLD
Rough Surface	EXTREME
Structured Surface	EXTREME


	6 mm 1/4 inch	8 mm 5/16 inch	10 mm 13/32 inch	18 mm 3/4 inch	22 mm 7/8 inch
TS-MAX TR-MAGNET SPEED MAGNET TF MAX	GOLD	01945	01958	01946 01949	01950 01952
TS / TS-PLUS TR / TR-S SPEED PLUS TF MEISTER	GOLD	01945	01958	01946 01949	01950 01952
SPEED-N SPEED-FAST STAR MAX / STAR	GOLD	01945	01958	01946 01949	01950 01952
SPEED POCKET RAPID PRACTIC			01959	01991 01992	01962 01965
TZ TX / TX-N	GOLD		01991 01993	01992 01994	01962 01965 01900
TP / TP-S / TQ	EXTREME				18914 01901
TI / TI-T	GOLD		01975 01978	01976 01974	01977 01979
SLIM SYSTEM CUTTER	EXTREME				18914 01901
BASIC KIT TEN-BRICK					01960 Ø 14 mm Ø 9/16 inch



01995 Ø1/4" (6mm)
Ø3/8" (10mm)



01996 Ø1/4" (6mm)
Ø5/16" (8mm)
Ø3/8" (10mm)
Ø3/4" (18mm)
Ø7/8" (22mm)



Ref.	Accessories
18910	Slim System Easy Trans
18913	Slim System Cutter Guide 110cm.
18713	Head Set Slim Cutter

Slim System Cutter

Hand cutting system with connectable guides.

For hand cutting, large format porcelain, between 3mm & 8mm thick.

- Cutting capacity of 122" (310cm). extendable as needed with additional guides.
- Facilitates a straight cut without deviations.
- Offers high quality performance.
- Progressive separation of the material, reducing the risk of breakage.
- With silicone cords incorporated in the guides at its base & the fixing suction pads, the SLIM SYSTEM guarantees accurate straight cuts without deviation.
- Tungsten carbide roller with titanium treatment bearing of Ø22mm to offer a high performance and quality cut.
- Separation system, by means of adjustable pincers, which ensure a gradual separation of the tile, thus reducing risk of breakage.
- The set consists of: 3 110cm guides, 1 roller guide with EXTREME scoring wheel with bearings Ø22mm (ref. 01901) and shaft (ref. 18717) for rough surfaces, 1 scoring wheel Ø22mm (ref. 18914) and for smooth surfaces., 2 spreader pincers, 2 suction pads, reinforced nylon carrying case.

	REF					
Slim System Cutter	18911	1	✓	122 1/16" 310 cm	1/8-3/16" 3-8 mm	15.2 Lb 6.9 kg



Slim Separator

Auxiliary breaker for the cut of slim porcelain slabs or large tiles.

- Auxiliary breaker for the cut of slim porcelain slabs or large tiles.
- To separate thicknesses of 8 mm or more.
- Soft-grip handle for a better comfort and ergonomic.
- With width adjustment system, to achieve an equal, uniform and symmetric distribution of breaking forces when cutting narrow stripes.

	REF	
Slim Separator	18917	1



Pliers Slim Cutter

- Separation system, by means of adjustable pincers, which facilitates and ensures a gradual separation of the workpiece, thus reducing the risk of breakage.

	REF	
Pliers Slim Cutter	18812	1



Slim System Cutter Guide

- Aluminium guide- 110cm.

	REF		
Slim System Cutter Guide 110cm.	18913	3.7 Lb	1



Head set slim cutter

- Replacement of the slim cutter.

	REF		
Head set slim cutter	18713		1



Slim System Easy Trans

Transport system Slim System

To transport large porcelain slabs.

- Ideal system for easy transportation of large format porcelain sheets.
- System can be used as accessory to SLIM SYSTEM CUTTER (Ref. 18911).
- Includes two extendable & adjustable guides 160cm & 320cm with 10 suction pads.
- Maximum load: 60kg. 132lbs.
- For sheets up to 3m.

	REF			
Slim System Easy Trans	18910	1		36.6 Lb 16.6 kg



Slim EASY TRANS supplementary guide set

- Slim Easy Trans has a set of perpendicular guides for increased stability.
- Increases the rigidity of the unit.
- Facilitates handling of the pieces.
- Fast and easy to assemble and disassemble.
- Black anodized finish.

	REF		
Slim EASY TRANS supplementary guide set	18819		1



2
YEAR
WARRANTY



SLAB TRANS Heavy Duty

- Conveyor/rack for handling ceramic sheets.
- Especially suited for handling thicker pieces.
- Greater structural strength. Reinforced aluminium profile. 2 perpendicular aluminium guides, for greater stiffness.
- Increased LOAD capacity. Includes 6 vacuum suction cups. Load capacity up to 309 lb (140kg).
- Fast and easy to assemble and disassemble. Black anodized finish. Retractable from 165 cm to 320 cm.
- Maximum load capacity: 309 lb (140kg).

REF



SLAB TRANS Heavy Duty

18936

1



2
YEAR
WARRANTY



Vacuum suction pad SLAB TRANS HEAVY DUTY

- This is a replacement suction cup for the SLAB TRANS HEAVY DUTY transport system.
- It can also be used as an additional cup for extra security. Ideal for heavy loads.
- NOTE: Adding more suction cups does not increase the original maximum load of 309 lb (140kg). It provides extra security in case of cup failure.

REF



Vacuum suction pad SLAB TRANS HEAVY DUTY

18827

1



TC-125 CIRCULAR CUTTER KIT

Circular cutter, smooth and precise, ideal for ceramic sheets.

- For cutting all types of ceramic sheets and tiles. Suitable for use with natural and sintered stone. Especially suitable for large tiles.
- Compatible with discs of 125 or 115 mm diameter. (Suitable for discs with reinforcement plate, TVA type).
- Switch with safety lock. Prevents unintentional start-up. Electrical cable with PRCD.
- Direct connection to AS-30 PRO (32 mm diameter) vacuum cleaner. Includes adapter for other models and brands (37, 42 and 50 mm diameter).
- Quick connection and regulating valve for hose** (16 mm diameter). Rubber stopper for suction outlet. Improves ergonomics during wet cutting.
- Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. Facilitates disc change and minimises the projection of particles and water.
- Tilting side guard for mitre cuts. reduces water splashing and improves dust suction.
- Includes TCR-125 SUPERPRO disc (dry cutting), transport case and accessories. Facilitates transport and handling.

REF	Icon	RPM	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
KIT TC-125 USA	51903	✓	13800	120V-60hz.	126"	1 3/16-1"	9/16-11/16"	4 1/2-5"	7/8"	129 1 3/16x94 1/8x81 1/8"	31 Lb	1



Circular saw TC-125

- Portable electric circular saw cutter. Suitable for wet or dry cutting.
- For cutting all kinds of ceramic tiles, ceramic sheet, natural stone and sintered stone. Especially suitable for large tiles.
- Switch with safety lock. Prevents unintentional start-up. Electrical cable with RCD.
- Bi-material additional grip. Principally for mitre cuts.
- Compatible with diamond discs of 125 or 115 mm diameter. (Suitable for discs with reinforcement plate, TVA type).
- Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. Facilitates disc change and minimises the projection of particles and water.
- Includes TCR-125 SUPERPRO disc (dry cutting), transport case and accessories. facilitates transport and handling.

REF	Icon	RPM	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
TC-125 USA	51957	✓	13800	120V-60hz.	1316-1"	9/16-11/16"	4 1/2-5"	7/8"	129 1 3/16x94 1/8x81 1/8"	31 Lb	1	



RM Rough Surface Suction Cups

- Suction cups for handling ceramic tiles with rough and/or slightly structured surfaces.
- Injected polycarbonate body. Very light.
- Metal reinforcement in the lever base for greater tensile strength.
- Ergonomic polypropylene handle, for faster, safer handling.
- Natural rubber.
- Maximum load capacity: 55 lb(25 kg).
- Suction cup diameter: 4 3/4(120 mm).

REF



RM Rough Surface Suction Cups

66929

1



RM Rough Surface Double Suction Cup

- Double suction cup for handling ceramic tiles with rough and/or slightly structured surfaces.
- Injected polycarbonate body. Very light. Metal reinforcement in the lever base for greater tensile strength. Ergonomic polypropylene handle, for faster, safer handling. Natural rubber.
- Maximum load capacity: 121lb (55 kg).
- Suction cup diameter: 4 3/4(120 mm).

REF



RM Rough Surface Double Suction Cup

66952

1



Suction cup with Vacuum Pump

- Suction cup for handling large and heavy ceramic tiles.
- Adapts to any surface finish.
- Suction applied by manual vacuum pump.
- Load loss indicator (red mark).
- Pressure-release mechanism.
- Maximum load capacity: 243 lb(110kg).

REF



Suction cup with Vacuum Pump

18919

1



Ref. 66900



Ref. 66900



Ref. 66904

Grout Saw & Suction cup

REF



Single suction cup

65900

1

Double Suction Cup


66900

1

Triple Suction Cup

66904

1

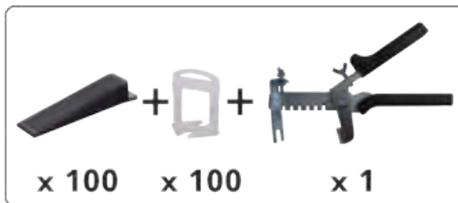

Kit Delta Leveling System

- The kit consists of 1 pliers, 100 clips and 100 reusable wedges.
- Packaged in a handy bucket.

	REF	
Delta leveling system kit 1/32" clips	03902	1
Delta leveling system kit 1/16" clips	03903	1



1/32" (1 MM)



1/16" (1.5 MM)



1/8" (3 MM)



Delta Leveling System Clip

- Made in PP.
- Different models available:
- Clip 1/32" (1 mm) 1/16" (1.5 mm) and 3/32" (2 mm), for tiles from 1/8" (3mm) to 1/2" (12 mm).
- 1/8" (3 mm) clip for tiles from 1/4" (6 mm) to 9/16" (15 mm).

	REF		
200 clips 1/32" delta lev. sys	02851	21	168
400 clips 1/32" delta lev. sys	02839	13	104
2400 clips 1/32" delta lev. sys	02870	1	16
200 clips 1/16" delta lev. sys	02841	21	168
400 clips 1/16" delta lev. sys	02842	13	104
2400 clips 1/16" delta lev. sys	02855	1	16
200 clips 1/8" delta lev. sys	02867	21	168
400 clips 1/8" delta lev. sys	02868	11	88
2400 clips 1/8" delta lev. sys	02869	1	16



Delta Leveling System Pliers

- Made of steel with ergonomic plastic handles.
- Protective sleeve on the clamp to avoid damaging the tile.
- 6 positions height adjustment according to the thickness of the ceramic tile.

	REF	
Delta Leveling System Pliers	02847	1




Delta Leveling System Wedge

- Made in PP.
- Reusable.

	REF		
Delta Leveling System Wedge (B-200 un)	02844	13	96
Delta Leveling System Wedge (B-400 un)	02845	6	48
Delta Leveling System Wedge (B-1200 un)	02857	1	18

CONSUMPTION

	cm	EXTRA-LARGE FORMATS							cm	SQUARE FORMATS									
		100 x 150	100 x 300	120 x 120	120 x 360	150 x 150	150 x 300			30 x 30	33 x 33	40 x 40	45 x 45	50 x 50	60 x 60	75 x 75	80 x 80	90 x 90	100 x 100
	inch	40" x 59"	40" x 118"	48" x 48"	48" x 142"	59" x 59"	59" x 118"		inch	12" x 12"	13" x 13"	16" x 16"	18" x 18"	20" x 20"	24" x 24"	30" x 30"	31" x 31"	35" x 35"	40" x 40"
	x pz.	12	18	10	20	14	20		x m ² / 10 sq. ft.	x m ² / 10 sq. ft.	44	37	25	20	24	17	14	13	10
	cm	RECTANGULAR FORMATS																	
	inch	15 x 60	15 x 90	15 x 120	20 x 40	20 x 60	20 x 80	20 x 100	25 x 100	30 x 60	30 x 120	40 x 80	40 x 120	45 x 90					
	x m ² / 10 sq. ft.	41	37	33	38	33	31	30	28	28	22	19	19	15					

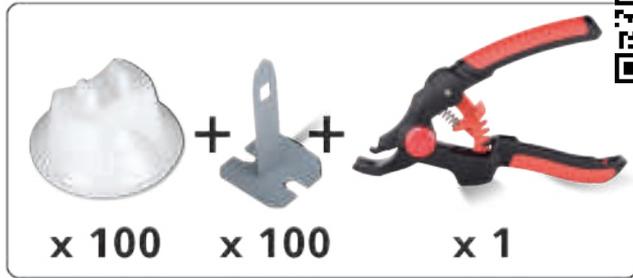

Kit TILE LEVEL QUICK

• The set consists of pliers, 100 straps and 100 reusable caps. Packaged in a handy bucket.

REF



Kit TILE LEVEL QUICK

02941

1



TILE LEVEL QUICK Pliers

• Ergonomic design with bimaterial handle. Made of very light and resistant materials. Tighten regulation system depending on the thickness of the ceramic tile.

REF



TILE LEVEL QUICK Pliers

02989

1



TILE LEVEL QUICK Heavy Duty nipper

- Metal version of the plastic TLQ nipper, fully compatible.
- Made of zinc-plated carbon steel.
- Ergonomic bi-material handle (plastic and rubber).
- Height adjustment with regulation screw (no tools required).

REF



TILE LEVEL QUICK Heavy Duty nipper

03900

1



TILE LEVEL QUICK Straps

- For tiles between 1/8" and 3/4" (3mm and 16 mm).
- Made of technical polymer non-hygroscopic.
- Doesn't need soaking before use.
- The strip thickness guarantees minimum grout of 1 mm.
- Ensures continuous tension between strips and caps groove.
- Grooved bases to improve the wetting of ceramic tile.

REF



TILE LEVEL (B-100 u.) Strip

02893

6

TILE LEVEL (B-400 u.) Strip

02895

6



TILE LEVEL QUICK Caps

- Reusable caps. Made of POM. Its design ensures even distribution of the contact pressure.

REF



TILE LEVEL CAPS (B-100 u.)

02890

10


TILE LEVEL CAPS (B-400 u.)

02892

8

CONSUMPTION

		EXTRA-LARGE FORMATS								SQUARE FORMATS									
	cm inch	100x150	100x300	120x120	120x360	150x150	150x300		cm inch	30x30	33x33	40x40	45x45	50x50	60x60	75x75	80x80	90x90	100x100
	x pz.	12	18	10	20	14	20		x m ² / 10sq. ft.	44	37	25	20	24	17	14	13	10	10
		RECTANGULAR FORMATS																	
	cm inch	15x60	15x90	15x120	20x40	20x60	20x80	20x100	25x100	30x60	30x90	30x120	40x80	40x120	45x90				
	x m ² / 10sq. ft.	44	37	33	38	33	31	30	28	28	22	19	19	15	15				

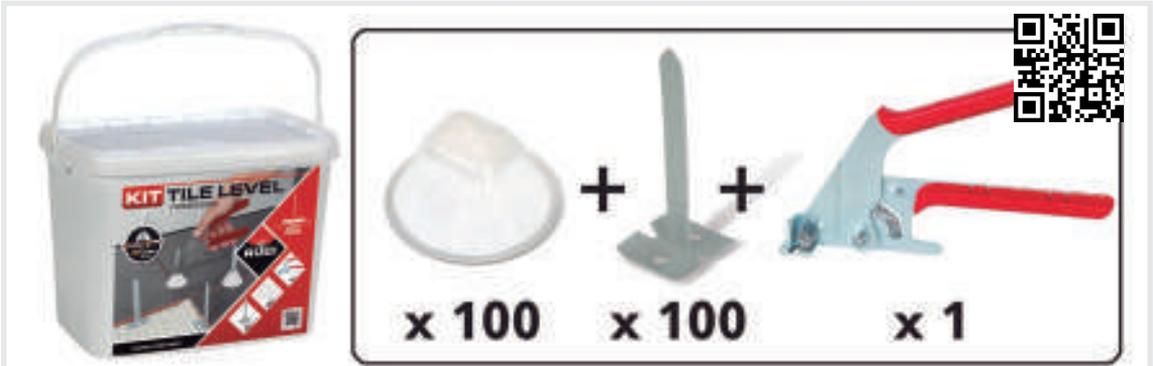

TILE LEVEL set

- The set consists of a pliers, 100 straps and 100 reusable caps.
- Packaged in a handy bucket.


	REF	
TILE LEVEL set	02992	1



TILE LEVEL pliers

- Can be used for floor and wall tiles.

	REF	
TILE LEVEL pliers	02982	1

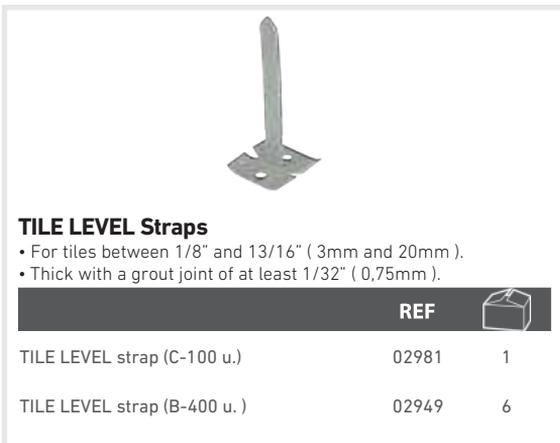

TILE LEVEL Straps

- For tiles between 1/8" and 13/16" (3mm and 20mm).
- Thick with a grout joint of at least 1/32" (0,75mm).

	REF	
TILE LEVEL strap (C-100 u.)	02981	1
TILE LEVEL strap (B-400 u.)	02949	6



TILE LEVEL Caps

- Can be reused up to 25 times.

	REF	
TILE LEVEL cap (C-100 u.)	02980	1
TILE LEVEL cap (B-400 u.)	02947	8

CONSUMPTION

		EXTRA-LARGE FORMATS						SQUARE FORMATS											
	cm inch	100x150	100x300	120x120	120x360	150x150	150x300		cm inch	30x30	33x33	40x40	45x45	50x50	60x60	75x75	80x80	90x90	100x100
	x pz.	12	18	10	20	14	20		x m ² / 10sq.ft.	44	37	25	20	24	17	14	13	10	10
		RECTANGULAR FORMATS																	
	cm inch	15x60	15x90	15x120	20x40	20x60	20x80	20x100	25x100	30x60	30x90	30x120	40x80	40x120	45x90				
	x m ² / 10sq.ft.	44	37	33	38	33	31	30	28	28	22	19	19	15	15				



CE EAC



RUBIMIX-9 N

Versatility by changing the mixing paddle.

For cementitious adhesives, resins, paints and other materials.

- New and improved handle. High comfort and stability.
- 2 speed gearbox and progressive switch (R.P.M. regulation) to optimize the mixing of each material.
- Quick and easy to change the brushes. High comfort.
- Safety lock to prevent unexpected start.
- Power: 1200 W.
- Double insulation.
- Direct connection M14 thread.
- Electronic regulator (1st 0-650 r.p.m. / 2nd 0-850 r.p.m.). Ø maximum paddle: 140 mm.
- Ø 4 3/4" (120 mm.) mixing paddle included.

	REF			W		RPM	
RUBIMIX-9 N USA + chuck	24949	2	24	1200 W	110-130V 50-60 Hz.	1ª 0-650 / 2ª 0-850	12.3 Lb 5.6 kg



CE EAC



RUBIMIX-9 N PLUS

More power and performance.

For cementitious adhesives, resins, paints and other materials.

- Powerful 1800W motor for greater mixing capacity and high reliability.
- New and improved handle. High comfort and stability.
- 2 speed gearbox and electronic regulator (r.p.m.) to optimize the mixing of each material.
- Quick and easy to change the brushes. High comfort.
- Electric mixer for mortar of great power: 1800W. Double insulation.
- Safety lock to prevent unexpected start.
- Direct connection M14 thread.
- Electronic regulator (1st 0-450 r.p.m. / 2nd 0-780 r.p.m.). Ø maximum paddle: 160 mm.
- Ø 5 1/2" (140 mm.) mixing paddle included.
- Includes Fast-in Adapter.

	REF			W		RPM	
RUBIMIX-9 N PLUS USA + chuck	26958	2	18	1800 W	120V 50-60 Hz.	1ª 0-450 / 2ª 0-780	12.8 Lb 5.8 kg



CE EAC



RUBIMIX E-10 ENERGY

Free movement.

For cementitious adhesives, resins, paints and other materials.

- Brushless motor. Maintenance-free and increases the product's lifespan. Maximum efficiency.
- Powered by 18V 5Ah Li-Ion battery.
- Light and strong. Maximum reliability.
- Dual bi-material grip handle. Better ergonomics, comfort and stability
- Equipped with a 2 speed gearbox.
- Progressive switch (RPM control) to optimise the mixing of each material.
- Switch safety lock. Prevents unintentional start-up.
- LED battery-charge indicator.
- Connection to mixing paddles with M14 thread and FAST-IN adapter (included).
- Double-insulated motor.
- Ref. 26965 Includes: Mixer, Battery Charger, 1 battery and M-120-FI mixing paddle.

	REF			RPM		
Rubimix E-10 Energy 18v cordless mixer	26965	√	100-240V 3A 50-60Hz	1° 0-420/ 2° 0-700	19 Lb	1
BATTERY ENERGY 18V 5AH	26966					1



Mixer Paddles FAST-IN 3HELIX

- To mix cement mortars.
- Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- Less effort in mixing.
- Less vibrations. Greater comfort.
- Fast connection without tools FAST-IN
- Compatible with RUBIMIX-9 N PLUS or FAST-IN (Ref. 76907) Adaptable to any mixer with M14x2 connection.

	REF				
Mixer paddle M-100-FI 3H	76941	33-44 Lb	21 3/4"	4"	6
Mixer paddle M-120-FI 3H	76942	33-55 Lb	24"	4 3/4"	2
Mixer paddle M-140-FI 3H	76943	55-88 Lb	24"	5 1/2"	2
Mixer paddle M-160-FI 3H	76944	66-132 Lb	24"	6"	2



Adapter FAST-IN thread

- Adapter for use of the FAST-IN mixer paddles.
- Transforms threaded connection M14x2 to quick connection system FAST-IN.
- Adaptable to any mixer with M14x2 thread.

	REF	
FAST-IN Adapter	76907	1



Paint Mixer

- To mix paint, drywall and mud.
- To mix all materials.
- White zinc coating for rust protection.
- 27" hexagonal shaft.

	REF			
Paint Mixer	76909	8 7/16"	27"	6



Eggbeater

- To mix thinset, mortar, grout and other setting materials.
- Reduces the creation of bubbles.
- White zinc coating for rust protection.
- 27" hexagonal shaft.

	REF			
Eggbeater	76908	5"	27"	6



Mortar mixer paddle - Hexagonal rod

- To mix mortar and other cement based adhesives.
- Made of steel with epoxy coating.
- Hexagonal shaft.

	REF				
Mortar mixer paddle M-100-L	24957	4"	30"	33-44 Lb	2



Standard mixing paddle - hexagonal rod

- To mix all materials.
- Reduces the creation of bubbles.
- Made of steel with epoxy coating.
- 3/8" (10mm) hexagonal shaft.

	REF				
Standard mixer paddle ML-100	24959	4 3/8"	24"	33-55 Lb	6



Mortar mixer paddle Thread M14 3HELIX

- To mix mortar and other cement based adhesives.
- Helix head with 3 blades for higher efficient mixing.
- Made of steel with epoxy coating.
- M14 x 2 thread connection
- Adaptable directly to RUBIMIX-9 N / 9 N PLUS and other brands.

	REF				
Mortar mixer paddle M-100-R 3H	25978	4"	21 3/8"	33-44 Lb	2
Mortar mixer paddle M-120-R 3H	25979	4 3/8"	24"	33-55 Lb	6
Mortar mixer paddle M-120-R 3H LONG	26953	4 3/8"	30"	33-55 Lb	6
Mortar mixer paddle M-140-R 3H	76919	5 1/2"	23 3/8"	55-88Lb	2
Mortar mixer paddle M-160-R 3H	76940	6"	23 3/8"	66-132Lb	2



RUBISCRAPER
Electric grout scraper

for grout removal without breaking the tile.

- Electric scraper perfect for grout removal without breaking the tile.
- It's an ergonomic tool and easy use with 3 speed options. Interchangeable and resharpenable blades available.
- Included 1.5 mm (1/16") and 3 mm (1/8") blades.

	REF		
RUBISCRAPER USA	66942	1	120V-60Hz
1.5 mm (1/16") blade	66810	1	
3 mm (1/8") blade	66812	1	



PRO HEAVY DUTY SCRAPER 5"

- To remove old coverings (ceramic tiles, wallpaper, vinyl tiles, carpets, paint, etc..)
- Ideal for repair jobs (substitution of broken tiles) and renovations.

	REF	
PRO HEAVY DUTY SCRAPER 5"	66953	1
5 BLADES FOR PRO HEAVY DUTY SCRAPER 5"	66954	1



Joint scraper

- Ergonomic handle with two electroplated tungsten carbide plates with high resistance to abrasion.
- Useable with 1, 2 or 3 plates depending on width of the joint.
- Supplied in blister.

	REF	
Grout Saw	65907	5



EASY GRES drill bits 1/4" to 4-3/4"

- Diamond drill bits to be used with electric drill without hammer.
- The quality of the diamond allows the drilling of ceramics, porcelain, granite, marble and glass.
- Ideal to install bathroom accessories and any type of decorative accessories over ceramic surfaces.
- They must always be used with the EASY GRES guide which allows their adequate refrigeration ensuring a high accuracy and good results.
- Average life between 5 and 10 holes depending on the material.
- Body made of steel and bit made of electrodeposited diamond.
- Lateral opening to improve cooling of the drill bit and to allow the elimination of solid waste produced after the drilling of the hole.
- Recommended speed of use between 400 and 1000 r.p.m. depending of the material to be drilled.
- To achieve a better finish and a longer life of the drill bit, it's important to observe the adequate speed of use and to apply a moderate pressure during the drilling. Supplied in blister.

	REF		RPM	
EASY GRES drill bit 7/32"	04922	10	1000 max.	
EASY GRES drill bit 1/4"	04920	10	1000 max.	
EASY GRES drill bit 5/16"	04923	10	1000 max.	
EASY GRES drill bit 3/8"	04924	10	1000 max.	
EASY GRES drill bit 1/2"	04921	10	1000 max.	
EASY GRES drill bit 7/32" set	04927	10	1000 max.	1"
EASY GRES drill bit 1/4" set	04925	10	1000 max.	1"
EASY GRES drill bit 5/16" set	04928	10	1000 max.	1"
EASY GRES drill bit 3/8" set	04929	10	1000 max.	1"
EASY GRES drill bit 1/2" set	04926	10	1000 max.	1"
EASY GRES drill bit 1/4" and 3/8" set	04909	10	1000 max.	1"
Replacement adhesives for EASY GRES 20 u.	04999	10	1000 max.	
EASY GRES drill bit 3/4"	05961	1	1000 max.	
EASY GRES drill bit 1 1/8"	05962	1	1000 max.	
EASY GRES drill bit 1 3/8"	05963	1	1000 max.	
EASY GRES drill bit 1 5/8"	05964	1	1000 max.	
EASY GRES drill bit 1 3/4"	05965	1	1000 max.	
EASY GRES drill bit 2"	05966	1	1000 max.	
EASY GRES drill bit 2 1/4"	05967	1	1000 max.	
EASY GRES drill bit 2 1/2"	05969	1	1000 max.	
EASY GRES drill bit 3"	05979	1	1000 max.	
EASY GRES drill bit 4"	05981	1	1000 max.	
EASY GRES drill bit 4 3/4"	05982	1	1000 max.	



FORAGRES drill bits Ø 13/16" to 4 3/4" (20 - 120 mm.)

- To drill Floor tiles, Porcelain tiles, Granite and Marble.
- Always use cooled with water and non-hammer electric drill.
- Ø 1 5/8" (40 mm.) drill bit, designed for housing of toilet flushing mechanisms. Supplied in blister.
- Average life between 60 and 80 holes depending on the material


	REF	
FORAGRES drill bit 3/4" (20 mm.)	04970	1
FORAGRES drill bit 1 3/8" (35 mm.)	04972	1
FORAGRES drill bit 1 5/8" (40 mm.)	04963	1
FORAGRES drill bit 2" (50 mm.)	04973	1
FORAGRES drill bit 2 1/2" (65 mm.)	04974	1
FORAGRES drill bit 3" (75 mm.)	04975	1
FORAGRES drill bit 4" (100 mm.)	04976	1
FORAGRES drill bit 4 3/4" (120 mm.)	04977	1



Drill Bit DRYGRES 4DRILL

- Dry drilling; wall tiles, stoneware, porcelain tiles and natural stone.
- Minimum working speed: 2500 r.p.m.
- Hexagonal connection without hammer. Ideal for battery-powered drills.
- Packed in blister.

	REF	
Drill bit DRYGRES 4DRILL Ø 1/4" (6 mm.) HEX	05904	1
Drill bit DRYGRES 4DRILL Ø 5/16" (8 mm.) HEX	05905	1
Drill bit DRYGRES 4DRILL Ø 3/8" (10 mm.) HEX	05906	1
Drill bit DRYGRES 4DRILL Ø 1/2" (12 mm.) HEX	05907	1
Drill bit DRYGRES 4DRILL Ø 9/16" (14 mm.) HEX	05908	1
Drill bit DRYGRES 4DRILL Ø 3/4" 20 mm. HEX	05909	1

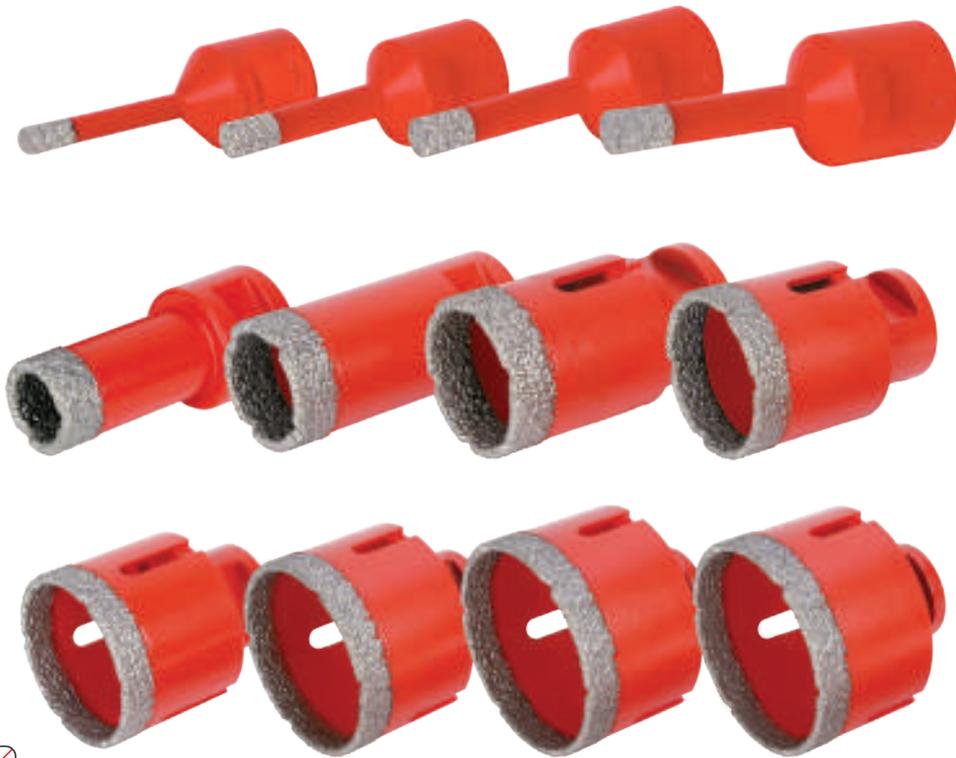

Drill Bit DRYGRES 4GRINDER

- For drilling in dry wall, stoneware and porcelain tiles.
- Maximum operating speed 14,000 r.p.m. 5/8" thread connection. Usable with grinder (direct connection) or electric drill (adapter ref. 05976). Supplied in blister.

	REF	
DRYGRES drill bit Ø 1/4" (6 mm.)	05993	1
DRYGRES drill bit Ø 5/16" (8 mm.)	05932	1
DRYGRES drill bit Ø 3/8" (10 mm.)	05901	1
DRYGRES drill bit Ø 1/2" (12 mm.)	05933	1
DRYGRES drill bit Ø 3/4" (20 mm.)	05934	1
DRYGRES drill bit Ø 1 1/8" (28 mm.)	05902	1
DRYGRES drill bit Ø 1 3/8" (35 mm.)	05987	1
DRYGRES drill bit Ø 1 3/4" (43 mm.)	05936	1
DRYGRES drill bit Ø 2" (50 mm.)	05903	1
DRYGRES drill bit Ø 2 1/2" (65 mm.)	05937	1
DRYGRES drill bit Ø 3" (75 mm.)	05938	1

KIT FORAGRES

- Kit includes:
- MULTIDRILL Guide.
- Tank and hose.
- Diamond drill bits Ø 3/4", 1 1/8", 1 3/8", 1 3/4", 2" and 2 1/2" (Ø 20, 28, 35, 43, 50, 65 mm.) and Case.

	REF	
Kit FORAGRES	50903	1

Kit DRYGRES 4DRILL

- Dry drilling; wall tiles, stoneware, porcelain tiles and natural stone.
- Minimum working speed: 2500 r.p.m.
- Hexagonal connection without hammer. Ideal for battery-powered drills.
- Kit consisting of:
- DRYGRES diamond drill bits 4DRILL; Ø 6, 8, 10 and 12 mm. (1/4", 5/16", 3/8", y 1/2")
- With case.

	REF	
Kit DRYGRES 4DRILL 6,8,10,12 mm (1/4", 5/16", 3/8", y 1/2")	05911	1

KIT 5 DRY DRILL BITS

The kit includes:

MULTIDRILL guide with suitcase. Dry cutting diamond drill bits:

kit 5: Ø1/4" (6mm), Ø3/8" (10mm), Ø1 1/8" (28mm), 1 3/8" (35mm) & 2" (50mm). 5/8" thread connection.

	REF	
Kit 5 bits DRYGRES	05996	1

KIT EASY GRES PLUS

- The kit includes:
- MULTIDRILL guide.
- Water tank and hose.
- EASY GRES drills Ø 3/4", 1 1/8", 1 3/8", 1 3/4", 2", 2 1/2" and 3" (20, 28, 35, 43, 50, 65 and 75 mm.) and case.

	REF	
Kit EASY GRES PLUS	50937	10

Ref. 50944



Ref. 50947



MULTIDRILL guide

- By fixing with sucker, allows horizontal and vertical holes in the right place, preventing the drill bit from slipping.
- Compatible with dry cutting diamond drill bits, removable diamond drill bits \varnothing 1/4" to 9/16" (6-14 mm.) and wet cutting diamond drill bits \varnothing 13/16" to 3" (20-75 mm.).
- Includes hose and tank connection (Ref. 50947).

	REF	
MULTIDRILL guide	50944	1
Tank for MULTIDRILL guide	50947	1



CHUCK

- Chuck attachable to RUBIMIX-9 and 9 PLUS to work with hexagonal and round finishing rods below 12mm. (1/2")
- Includes chuck key - S2 Ref. 71969.

	REF	
Chuck	71967	1



Electric drill adapter

- For the use of dry cutting diamond drill bit with electric drill. (5/8 to \varnothing 10)
- Use without hammer.

	REF	
5/8" to \varnothing 10 adapter for electric drill	05977	1
M14 Drill bit adaptor for electric drill	05976	1



Spacer horseshoe

- For Rectify the position of the pieces during installation.
- Thanks to their geometry, horseshoe shaped, these spacers can be combined together to give the same function as a traditional crosshead or "T".

	REF	
SPACER HORSESHOE 1/16" (300 UN) JAR	13841	10
SPACER HORSESHOE 1/8" (250 UN) JAR	13840	10



Tile spacers 1/32" (1mm.)

- For wall & floor tiles with minimum joint.
- Quality base material, without impurities or imperfections.

	REF	
Tile Spacers 1/32" - (B-300 u.)	02911	10



Tile Spacer 1/16" (1.5mm.)

- For wall & floor tiles with minimum joint.
- Quality base material, without impurities or imperfections.

	REF	
Tile Spacers 1/16" - (B-300 u.)	02912	10
1/16" - (36 x B-300 pc.) DISPLAY BOX	02124	1
Tile Spacers 1/16" - (1000 pc.) JAR	02280	1



Tile Spacer 3/32" (2mm.)

- For wall tiles.
- Quality base material, without impurities or imperfections.

	REF	
Tile Spacers 3/32" - (B-300 u.)	02901	10



Tile Spacers 1/8" (3mm.)

- For floor tiles with thin joint.
- Quality base material, without impurities or imperfections.

	REF	
Tile Spacers 1/8" - (200 pc.)	02902	10
1/8" - (42 x B-200 pc.) DISPLAY BOX	02127	1
Tile Spacers 1/8" - (1000 pc. JAR)	02281	1



Tile Spacers 3/16" (5mm.)

- For floor tiles.
- Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	
Tile Spacers 3/16" - (B-100 u.)	02903	10
3/16" - (36 x B-100 pc.) DISPLAY BOX	02130	1
Tile Spacers 3/16" - (400 pc. JAR)	02282	1



Tile Spacers 1/4" (6mm.)

- For floor tiles.
- Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	
Tile Spacers 1/4" - (B-100 u.)	02036	10



T for grouts 1/32" (1mm)

- Ideal for placement to "break joint" and perimeter.
- quality base material without impurities or imperfections.

	REF	
T for grouts 1/32" (1mm) (B-300 un.)	02859	10
T for grouts 1/32" (1mm) (B-1000 un.)	02862	1



T for grouts 1/16" (1.5mm)

- Ideal for placement to "break joint" and perimeter.
- quality base material without impurities or imperfections.

	REF	
T for grouts 1/16" (1.5mm) (B-300 un.)	02860	10
T for grouts 1/16" (1.5mm) (JAR-1000 un.) USA	02715	12



"T" 1/8"

- Ideal for "brick style" tiling and perimeters.
- Quality base material, without impurities or imperfections.

	REF	
"T" spacers 1/8" -(B-200 u.)	02923	10
"T" spacers 1/8" -(B-1000 u.)	02063	1
"T" spacers 1/8" -(JAR-1000 u.)	02399	1



"T" 3/16" (5mm)

- Ideal for "brick style" tiling and perimeters.
- Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	
"T" spacers 3/16" (5 mm.) -(B-100 u.)	02924	10
"T" spacers 3/16" -(JAR-400 u.)	02398	1



Wedges

- Wedges for tiling.
- Quality base material, without impurities or imperfections.

	REF	
Wedges 3/16" (5 mm.)-(B-500 u.)	02950	10
Wedges 3/16" (5mm.)-(JAR-500 pcs.)	02283	1



Tile spacers TwinFlex® Recoverable and multifunctional.

For creating perfect placement joints in floor and walls.

- Two sizes in the same model, triple function: crosshead, T and lineal separator.
- Translucent for proper visualization of the ceramic tile.
- Allows perfect alignment of the board at two different levels.
- Manufactured in quality base material, a color for each model identification, patented model.

	REF			
TwinFlex® 1/16" - 1/8" Bag 100	02957	10	100	
TwinFlex® 1/16" - 1/8" Jar 250	02995	1	250	
TwinFlex® 3/32" - 3/16" Bag 100	02956	10	100	
TwinFlex® 3/32" - 3/16" Jar 250	02994	1	250	



Ref. 74980

Ref. 72910

Ref. 72911

Ref. 72949

Trowels & notched trowels open RUBIFLEX handle

- Steel plate special high wear resistance with corrosion protection by clear coat.(STEEL)
- Ergonomic RUBIFLEX handle with two textures.
- Perfect flatness of the plate.


	REF					
STEEL Flat trowel	72917	6	270			
STEEL notched trowel 1/8" x 1/8"	72906	6	270	1/8"	1/8"	
STEEL notched trowel 3/16" x 3/16"	74980	6	270	3/16"	3/16"	
STEEL notched trowel 1/4" x 1/4"	72907	6	270	1/4"	1/4"	
STEEL notched trowel 1/4" x 3/8"	74981	6	270	1/4"	3/8"	
STEEL notched trowel 5/16" x 5/16"	72908	6	270	1/4"	3/8"	
STEEL notched trowel 3/8" x 3/8"	72909	6	270	3/8"	3/8"	
STEEL notched trowel 1/2" x 1/2"	74982	6	270	1/2"	1/2"	
STEEL notched trowel triangular 1/4" x 7/32"	72911	6	270		1/4"	3/16"
JAGGED TROWEL R-3/8" (10 mm.)	72910	6	270			3/8"
Notched trowels YW	72949	6				



Pro stainless steel trowel

- Tile adhesive (thin-set) application.
- Aluminium structure. Light and resistant. Bi-material handle RUBIFLEX. Improves ergonomics. Stainless steel plate.
- Plate's fixation by 6 electro welded points. Irremovable and maximum mechanical resistance.

	REF	
Pro stainless steel flat trowel	76950	1
Pro stainless steel 1/8" x 1/8" trowel	76951	1
Pro stainless steel 1/4" x 1/4" trowel	76952	1
Pro stainless steel 5/16" x 5/16" trowel	76953	1
Pro stainless steel 3/8" x 3/8" trowel	76954	1
Pro stainless steel 1/2" x 1/2" trowel	76955	1
Pro stainless steel 5/8" x 5/8" trowel	76956	1

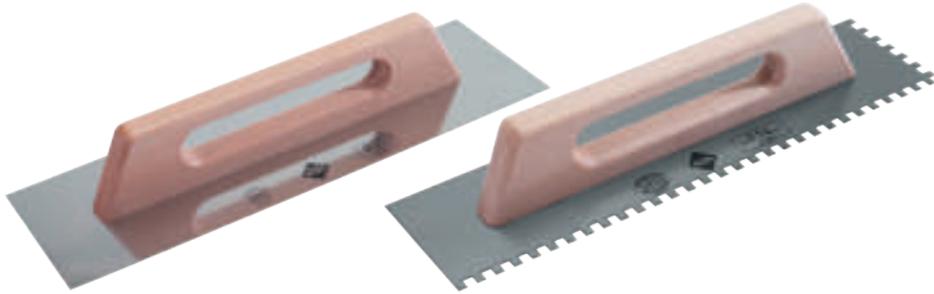

19" (48cm) Trowels & notched t. closed wood handle

- Steel plate special high wear resistance, corrosion-protected by clear coat (STEEL).
- Perfect flatness of the plate.
- The notches 13/16" x 13/16" (20 x 20 mm.) developed for dosing of glue mortar on uneven floors. Allows more material thickness.

	REF					
STEEL FLAT trowel 19" (48 cm.)"	65988	6	312			
STEEL NOTCHED trowel 19" (48 cm.) 1/4" x 1/4" (6 x 6 mm.)	65958	6	312	1/4"	1/4"	
STEEL NOTCHED trowel 19" (48 cm.) 5/16" x 5/16" (8 x 8 mm.)	65959	6	312	5/16"	5/16"	
STEEL NOTCHED trowel 19" (48 cm.) 3/8" x 3/8" (10 x 10 mm.)	65983	6	312	3/8"	3/8"	
STEEL NOTCHED trowel 19" (48 cm.) 1/2" x 1/2" (12 x 12 mm.)	73973	6	312	1/2"	1/2"	
STEEL NOTCHED trowel 19" (48 cm.) 13/16" x 13/16" (20 x 20 mm.)	75962	6	312	13/16"	13/16"	



PFP

- Bucket and trowel Ergonomic RUBIFLEX.

	REF					
PFP05-(7 7/8")	75420	6	8"	4 5/16"	0.703 Lb	
PFP05-(7 7/16")	75418	6	7"	4 1/8"	0.628 Lb	
PFP19- 4 5/16"	76808	6	4 5/16"	3 1/8"	0.335 Lb	
PFP19- 5 1/16"	76809	6	5 1/16"	3 3/16"	0.37 Lb	
PFP33-6 3/4" x 2"	79050	6	6 1/16"	1 13/16"	0.34 Lb	



Manual grout mortar applicator

- Great capacity (650 cc) grout mortar applicator.
- Very light structure made of aluminum.
- It allows an easy, quick and clean application.
- Reduce consumption of grout and after grouting dirt.
- Pressure adjustable with trigger.
- Replaceable and adjustable nozzles to the joint width.
- Also usable for the application of silicone and PU rigid and flexible cartridges.
- Quick and clean application.

	REF	
Manual grout mortar applicator 650 cc.	65990	1
Set of spare pads for grout mortar applicator (Includes screw, piston and 3 nozzles)	65981	1
Spare nozzles for grout mortar applicator (Includes 6 nozzles)	65980	1



Latex gloves

- Ideal for wet or abrasives tasks.
- For minimal risks only.
- Made of 100% latex.
- Conforms to EN420.

	REF	
Latex gloves	20907	12



Shape Template

- Copies the shape of the areas which are awkward to mark onto tiles, for subsequent cutting. Maximum depth 4.5cm (1-3/4").

	REF	
Shape Template	70925	10



Ref. 65926

Ref. 83942

Rule support set

- Tungsten carbide edge of great hardness.
- To rectify cuts of ceramics.

	REF	
Nippers for ceramic tiles	65926	6
Nippers for porcelain and glass tiles	83942	5



Tile beating block

- For a good settlement of tiles.
- Waterproof and high wear resistance wood.
- Perfect flatness.
- Dimensions: 15 3/4" x 5 3/4" (40x14,5 cm.)
- Ref. 72980 with white natural rubber sheet to prevent damage to the tile.

	REF	
Tile beating block 40 x 14,5 cm. with rubber	72980	1



Rule support set

- For easy adjustment and Leveling of the rule for wall tiling.
- In box of 2 units.

	REF	
Rule support set 20" (50 cm.)	60998	1



Suction cups

- Maximum load of capacity: 88Lb (40 kg).
- Maximum load of capacity: 176,4Lb (80 kg).
- Maximum load of capacity: 220,5Lb (100 kg).

	REF	
Single suction cup	65900	1
Double suction cup	66900	1
Triple suction cup	66904	1



Rubber mallet - 2 flat sides

- Allows to strike at any angle so as to install the tile into its correct position.

	REF	
White rubber mallet 17.6 oz. (500 gr.)	65913	6
White rubber mallet 26.4 oz. (750 gr.)	65914	6



Dripless heavy duty caulk gun

- Dripless heavy duty 10 Oz. caulk gun.

	REF	
Caulk gun 9 inch	66992	6



RubiLevel Antishock

- Levels manufactured in reliable, resistant aluminum.
- Double machining to ensure a constant precision in the top face and the base.
- Accuracy: 0,5 mm/m.
- Three bubbles, for checking horizontal, vertical and 45° levels.
- Double and ergonomic bi-material handle.
- Rubber protector at the ends.

	REF	
RubiLevel Antishock 24" (60 cm.)	76932	8
RubiLevel Antishock 32" (80 cm.)	76933	8
RubiLevel Antishock 40" (100 cm.)	76934	8
RubiLevel Antishock 48" (120 cm.)	76935	8



Folding 4-in-1 working table

- 4 uses in 1: Work bench, scaffold, dolly and creeper.
- Foldable, easy to transport and storage.
- Double sided board: MDF wood side (work bench function) and non-slippery PP plastic side (rest of functions). EASY interchangeable.
- Reinforced stainless steel area for harder jobs. Avoids damages on wooden surface.
- Angle conveyor and rule printed on the wooden side, also includes a hole for small drillings (max. 25 mm) and hand tools intersts on metal frame.
- 2 Adjustable heights: 55 cm (21 5/8") and 80cm(31 1/2")
- Folded table: 80x52x12,5cm(31 1/2"x20 1/2"x4 15/16). 150kg(330Lb.)
- Unfolded table: 115x52x80cm(45 1/4"x20 1/2"x31 1/2). 200kg(440Lb.)


	REF	
Folding 4-in-1 working table	66924	1



Grout floats PRO

- For grouting ceramic tiles.
- Grout Float (Ref.84924)with sheet resistant to abrasion.
- Replaceable with spare (ref. 84925).

	REF	
Replaceable Grout float PRO	84924	6
Spare Grout float PRO	84925	15



Flexible plaster floats

- Flexible polyethylene and nonstick base

	REF	
Flexible plastic handle float 12" x 5" (30 x 14 cm.)	71904	6



Rough wooden handle floats

- For plastering walls.
- Rough finish.

	REF	
Rectangular float 10" x 7" (27 x 18 cm.)	65947	10
Rectangular float 13" x 9" (34 x 23 cm.)	65948	10



Grout floats PRO

- For grouting ceramic tiles.
- Black foam rubber
- Grout Float PRO 9"x4" 22.5x10cm.(Ref.10607), with white rubber sheet wear resistant.

	REF	
Rubber grout float 9"x4"x19/32" (22,5x10x1,5cm)	10607	6



Ref.65975 Ref.65971 Ref.65973 Ref.65972

Grout floats Superpro Wood

- For grouting ceramic, wood ergonomic handle.
- Available in different hardnesses of rubber for best finish as the joint width.
- Rubber float trowel, with white rubber sheet wear resistant.
- Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF	
Solid rubber grout float SUPERPRO	65975	6
Rubber grout float SUPERPRO	65971	6
Thermoflex rubber grout float SUPER-PRO	65973	6
SOLID RUBBER FLOAT	65972	6



Smooth plastic handle floats

- Reinforced plate of high resistance to abrasion and long durability.
- Perfectly flat base.

	REF	
Rectangular float 10" x 5" (27 x 14 cm.)	71947	10



RUBICLEAN ECO KIT & SPONGE FLOAT PRO PLUS

- Composed by: Rubiclean Eco (Ref. 24948), Sponge standard (Ref. 24966), Rubber Trowel for Joints (Ref. 24969) and High absorption sponge plus with handle (Ref. 24988).

	REF	
RUBICLEAN ECO KIT	68910	1



RUBICLEAN TRIPLE SUPERPRO

- Plastic washboy, lightweight and high resistance.
- Equipped with 3 spiral rollers for further draining.
- Includes wheels and carrying handle.
- Capacity: 5.3 gl. (24 l.)
- Useful capacity: 2.2 gl. (10 l.)
- Dimensions: 20 7/8" x 11 1/32" x 14 9/16" (53 x 28 x 37 cm.)
- Supplied assembled and in 1 unit box.

	REF	
RUBICLEAN TRIPLE SUPERPRO washboy	21995	1



Sponge float PRO

- Polyurethane foam floats with high absorption.
- The PLUS model has slits for increased performance drag dirt.
- With slits for better performance dragging dirt.

	REF	
Sponge float PRO PLUS	24988	10



Sponge float SUPERPRO

- Floats with SUPERPRO sponge for grout cleaning and finishing.
- PLUS model has cuts for increased performance in wiping away dirt.

	REF	
Sponge float SUPERPRO PLUS	20908	10



Accessories for Cleaning

• Float sponges for cleaning and finishing tile and grout jobs. Interchangeable sponges adaptable to the ergonomic handle. (ref 22912) and secure attachment to other brands.
Sponges available with different levels of absorption and resistance to abrasion. Comfortable and secure attachment system.
PLUS models have cuts for increased drag on the dirt.

	REF	
Float with replaceable SUPERPRO sponge	22900	10
Float with replaceable SWEEPEX SUPERPRO sponge	22916	10
Replaceable SUPERPRO sponge (no cuts)	22910	10
Replaceable SUPERPRO sponge PLUS (with cuts)	22918	10
Replaceable SWEEPEX SUPERPRO sponge (no cuts)	22922	10
Replaceable SWEEPEX SUPERPRO sponge PLUS (with cuts)	22914	10
Replaceable ABRASIVE SUPERPRO sponge	22920	10
Replaceable EPOXY CELLULOSE SUPERPRO sponge	22932	10



Float with 10" (25 cm.) SUPERPRO pads

- To clean ceramic surfaces and other materials.
- Float with three different roughness replaceable pads; soft (red), medium (blue) and hard (brown).
- Float with three very stuff pads (white).
- 3 sets of pads: very soft (white), soft (red), medium (blue) and hard (brown)
- Available set of 3 pads of different roughness: soft (red), medium (blue) and hard (brown).

	REF		
Float + 3 mixed pads	20900	10x4x1"	1
3 pads replacement set - SOFT	20972	10x4x1"	1
3 pads replacement set - MEDIUM	20973	10x4x1"	1
3 pads replacement set - HARD	20974	10x4x1"	1
3 pads replacement set - SOFT/MEDIUM/HARD	20902	10x4x1"	1



Hidro Rounded Sponges

- Hidro Rounded Sponge vacuum packaged 30 units, not individually packed.
- Polyurethane sponges.
- HIDRO models are highly absorbent.
- Extra large all purpose sponge.

	REF	
Hidro Rounded Sponge vacuum packaged (30un)	68999	30



Mixed Round Sponge

- Mixed Rounded Sponge vacuum packaged 30 units, not individually packed.
- Polyurethane sponges.
- Mixed models : heavy duty grouting and haze buffer sponges.

	REF	
Mixed Rounded Sponge vacuum packaged (30un)	68997	30



SUPERPRO sponges

- PLUS models have cuts for increased drag on the dirt.
- Ref. 20905 and 20906 available in Palbox.

	REF	
SUPERPRO sponge	20905	24
MIXED sponge	20906	24
SUPERPRO sponge SWEEPEX	20928	24
STANDARD PRO sponge	24966	24



Hidro Rounded Sponge-Display

- Sponges provides individually packed and with cardboard display. Polyurethane sponges.
- HIDRO models are highly absorbent.
- Extra large all purpose sponge.

	REF	
XL HIDRO ROUND SPONGE-DISPLAY (22 1/2" x 20 3/16" x 23 5/8")	68995	120



Mixed Rounded Sponge-Display

- Sponges provides individually packed and with cardboard display. Polyurethane sponges.
- Mixed models : heavy duty grouting and haze buffer sponges.

	REF	
MIXED ROUND SPONGE-DISPLAY (22 1/2" x 20 3/16" x 23 5/8")	68996	120



Superpro Sponge

- Contains x135 units of ref. 20905.
- Dimensions: 23" x 15" x 47" (60 x 40 x 120 cm.).

	REF	
SUPERPRO sponge palbox	69955	1



Professional knee pads

- Professional knee pads of great comfort.
- Made of absorbent material to protect against knocks and bumps of the ground.
- Its internal design is perfectly adaptable to the user's knee.
- Big leaning surface for optimum stability.
- Adjustable superior fastener.
- Conforms to EN14404.
- Protection level: 0

	REF	
Professional knee pads	65915	6



SR-1 ergonomic seat

- Aluminum chassis high strength and stability.
- Allows an ergonomic position of comfort.
- Prevents injuries in knees and back.
- Adjustable seat height and angle for optimum adaptation to each use.
- Robust construction with 7 heavy duty wheels.
- Includes tray for tools and accessories.
- Ideal for flooring, parquet installation, cleaning and other operations on pavements tasks.
- Replaceable ergonomic knee.
- Maximum weight: 286 lb. (130 kg.)

	REF	
SR-1 ergonomic seat	81999	1



Gel Duplex knee pads

- Professional knee pads with ergonomic design. Highly comfortable.
- Their design combines the use of hard materials to protect against impacts and uneven floors and soft materials adaptable to the user's anatomy on the inside.
- Besides protecting the user's knees thanks to the silicone gel in their inside, their studied ergonomics gives them great stability, preventing ligaments and tendons fatigue.
- Wide range of uses thanks to their design "two in one":
- Can be used together with the external rubber protection of great stability and resistance.
- With the main body only, less bulky, which allows the knee to slide without problem over smooth surfaces.
- They incorporate a double fastener, inferior and superior, easy adjustable.
- Conforms to EN14404.
- Protection level: 1

	REF	
GEL DUPLEX knee pads	81989	6



Gel Comfort knee pads

- Ergonomic design professional and high comfort knee pads.
- Its design combines the use of hard materials against impacts and uneven floors and soft materials therein, adapted to the user's anatomy.
- In addition to protecting the user's knees through the use of silicone gel inside, its studied ergonomics provide them with great stability, preventing ligaments and tendons fatigue.
- They incorporate two bands Neoprene closure.
- Conforms to EN14404.
- Protection level: 1

	REF	
GEL COMFORT knee pads	81998	6



Rubber basket Espuerta N° 2 (3 gal.)

- Flexible. Ideal to carry with one hand.
- Polyamide reinforced with nylon fabric to increase tensile strength. At 86° F the tensile strength is 90 MPa, and elongation 45%.
- Handles great thickness. Increased resistance.
- Rounded geometry handles. More comfort.

REF				
Rubber basket "Espuerta" No.2 (3 gal.)	88941	10	5 1/2"	14" 3.55 Lb



Rubber bucket "italiano" with flat side & handle (2.7 gal.)

- Flat face. Greater comfort during transport. For easy waste collection.
- Plastic handle grip. Greater comfort.
- Highly resistant metal handle.
- Walls are reinforced with ribbing.

REF				
Rubber bucket "italiano" with flat side & handle (2.7 gal.)	88940	10	6 1/16"	13" 4.2 Lb



English rubber bucket "Rubberbuck" (3.70 gal.)

- Embossed scale.
- With spout to prevent spillages when pouring.
- With reinforced rim for greater resistance.
- Wooden handle grip. Greater comfort.
- Highly resistant metal handle.
- Clear wire handle with protected ends. Does not get in the way.
- Walls are reinforced with ribbing.

REF				
English rubber bucket (3.70 gal.)	88803	10	11 7/16"	12" 4.63 Lb



Rubber bucket with graduation no.3 "Rubberbuck" (4 gal.)

- Embossed scale.
- Highly resistant metal handle.
- Walls are reinforced with ribbing.

REF				
Rubber bucket with graduation no.3 (4 gal.)	88911	10	12"	12" 5.7 Lb



English bucket with grad.,spout "Rubberbuck" (3.2 gal.)

- Highly resistant metal handle.
- Walls are reinforced with ribbing.

REF				
Industrial bucket N° 52 (3.2 gal)	88908	10	10 1/4"	12" 4.2 Lb



Rubber bucket "italiano" with handle (2.7 gal.)

- Greater comfort during transport. For easy waste collection.
- Plastic handle grip. Greater comfort.
- Highly resistant metal handle.
- Walls are reinforced with ribbing.

REF				
Rubber bucket "italiano" with handle (2.7 gal.)	88915	10	6 1/16"	13" 4.2 Lb



RubberMAX 7.9Gal. with handle

- Highly resistant metal handle.
- Walls are reinforced with ribbing.

REF				
RubberMAX 7.9Gal. with handle	88827			



Rubber tray no. 4 "Rubtray" (10.5 gal.)

- Suitable for all types of construction industry professionals
- With reinforced rim for greater resistance.
- Walls and base reinforced with ribbing.

	REF				
Rubber tray no. 4 (10 gal.)	88935	5	8"	27 1/16"x20"	14.66 Lb



Rubber tray no. 3 "Rubtray" (6.34 gal.)

- Suitable for all types of construction industry professionals.
- With reinforced rim for greater resistance.
- Walls and base reinforced with ribbing.

	REF				
Rubber tray no. 3 (6.34 gal.)	88934	10	6 1/16"	24x17 1/16"	9.7 Lb



Rubber basket "espuerta" no. 103 (15.8 gal.)

- Polyamide reinforced with nylon to increase tensile strength. At 86°F the tensile strength is 90 MPa, and elongation 45%.
- Handles very thick. Increased resistance.

	REF				
Rubber basket "espuerta" no. 103 (15.8 gal.)	88927	5	17 1/16"	21 1/8"	11.9 Lb



Canarian rubber bucket "Rubberbuck" (4.8 gal.)

- Rounded geometry handles. Comfort.
- Wall with reinforcing ribs

	REF				
Canarian rubber bucket with plastic handle (4.8 gal.)	88906	10	14"	11 7/16"	6.06 Lb



Plastic bucket model 2 "Lightbuck" (5.8 gal.)

- Greater comfort during transport. Easy waste collection.
- Heavy duty metal handle
- Plastic handle. Comfort.

	REF				
Plastic bucket model 2 with plastic handle (5.8 gal.)	88772	10	14 1/16"	10 5/8"	2 Lb



Plastic tub N° 4 "Flextub" (14.5 gal.)

- Greater comfort during transport. For easy waste collection.
- Lightweight.

	REF				
Plastic tub Black color N° 4 (14.5 gal.)	88774	10	13"	20 7/8"	3.5 Lb



Rubber basket Espuerta No. 99 (8.7 gal.)

- Flexible. Perfect for carrying with one hand.
- Reinforced with polyamide nylon weave to increase the tensile
- Very thick handles. Greater resistance.
- Handles with a rounded shape. Greater comfort.

	REF				
Rubber basket "Espuerta" No. 99 (8.7 gal.)	88804	10	13 3/8"	16"	5 Lb



Plastic tub N° 3 "Flextub" (10.5 gal.)

- Greater comfort during transport. For easy waste collection.
- Reinforced handles. Greater resistance.
- Light.

	REF				
Plastic tub Black color N° 3 (10.5 gal.)	88773	10	13"	17 1/16"	2.9 Lb



Rubber rubble chute with top metal hopper "Rubchute"

- First segment of chute, with metal top hopper. Designed for loading waste from a wheelbarrow or shovel.

	REF							
Rubber rubble chute with top metal hopper	88811	1	20 1/16" 510 mm	14 15/16" 380 mm	59" 150 cm	55 1/8" 140 cm	3/8" 10 mm	53.95 Lb 24.47 kg



Rubber rubble chute standard section "Rubchute"

- Attaches to sections with top and side hoppers and to all other chute accessories.

	REF							
Rubber rubble chute standard section	88814	3	20 1/16" 510 mm	14 15/16" 380 mm	43 3/16" 110 cm	39" 100 cm	3/8" 10 mm	32.78 Lb 14.87 kg




Rubber rubble chute side-entry section "Rubchute"

- Rubble chute with side hopper Allows for unloading rubble at an intermediate section of the chute Specially adapted for unloading rubble from windows and balconies.

	REF							
Rubber rubble chute side-entry section	88813	1	20 1/16" 510 mm	14 15/16" 380 mm	43 3/16" 110 cm	39" 100 cm	3/8" 10 mm	42.79 Lb 19.41 kg




ESSENTIAL RULES TO FOLLOW FOR ASSEMBLY

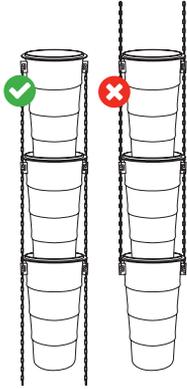

The chute chains should always be hanging down, never upwards.




The chute column should hang free, with no bends and held only by the upper part.

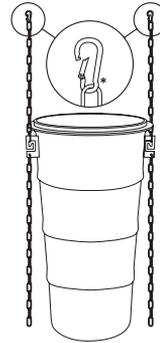


You can request sets of chains with carabiners for the first chute.
* Safety Catch

✓ Recommended one support every 15 metres of chute column.

FOLLOW THE INSTRUCTIONS

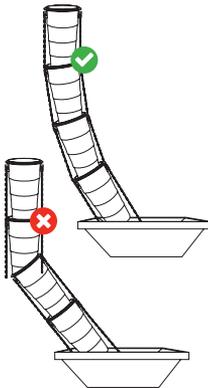

BENDS:
Left: What you should NOT do.
Right: Perfect angle.

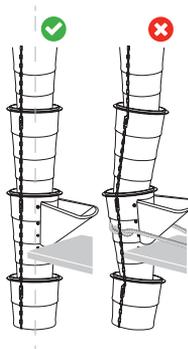

SIDE HOPPER
DO NOT force onto the wall, making the column unbalanced.
DO keep the column upright



TOP HOPPER
DO NOT start the column with a side hopper piece. Unsecured, loose or unscrewed hopper section



Balance beam column hook

- This accessory is compatible with the winch to balance the chute fastening.

REF



Balance beam column hook

88514

1



Chute top metal hopper (only rubber ch.)

- Metal top hopper for loading into rubber chute
- It transforms a straight section into the top segment.

REF



Chute top metal hopper (only rubber ch.)

88511

1



Rubble chute chain set

- Set of chains for rubble chute (2un).
- Extra-reinforced. 7mm thickness. DIN 763 standard.

REF



Rubble chute chain set (2un)

88519

1



Chute scaffold fastening system

- Mounting bracket to fix top of chute to scaffold.
- Reinforced. Holds the weight of the chutes that hang from it.
- Easily fixes to the scaffold.
- For greater safety and security we recommend installing this piece at intermediate sections of the chute column. Specifically, one piece every 15 metres of chute.

REF



Chute scaffold fastening system

88517

1



Rubble chute support bracket for buildings

- Mounting bracket for the top of the chute column.
- Reinforced. Holds the weight of the chutes that hang from it.
- Easily attachable to any structural element of the building (floor frame, window, balcony, etc.) thanks to its two fixing positions.
- Includes two clamps for ideal fastening.
- For greater safety and security we recommend installing this piece at intermediate sections of the chute column. Specifically, one piece every 15 metres of chute.


REF



Rubble chute support bracket for buildings

88515

1



Chute control ring

- This accessory fixes to the last section of the chute.
- It allows the last section of the chute to be easily manoeuvred into the desired position.

REF



Chute control ring

88516

1



Bracket & winch for chute

- Attaches to the chute support brackets for buildings and scaffold.
- Manual winch with 15 metres of cable, equivalent to the length of 12 chutes.
- Ideal for building renovation works where a tower crane is not available.

REF



Bracket & winch for chute

88520

1



Chute extension arms

- Chute extension arms (2un)


REF



Chute extension arms (2un)

88513

1

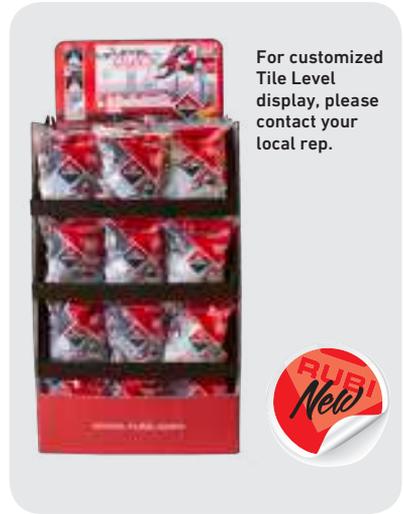

KIT TILE LEVEL QUICK PALBOX

- Contains 16 Kits TILE-LEVEL QUICK (Ref. 02941)
- It Includes LCD screen with demo video.
- Dimensions: 60 x 40 x 120 cm.

	REF	
TILE-LEVEL palbox with screen (16 sets)	02998	1



KIT DELTA LEVELING SYSTEM 20 UN. PALBOX

- Ready to use by just removing the cover.
- It contains:
- 20 DELTA Leveling System kits.
- Measurements: 23 5/8 x 15 3/4 x 41 5/16 (60 x 40 x 105 cm).

	REF	
DELTA LEVELING SYSTEM 1/32" (1mm) Pal Box (20 Un.)	03905	1
DELTA LEVELING SYSTEM 1/6" (1,5mm) Pal Box (20 Un.)	03906	1



Hidro Rounded Sponge-Display

- Sponges provides individually packed and with cardboard display. Polyurethane sponges.
- HIDRO models are highly absorbent.
- Extra large all purpose sponge.

REF 

XL HIDRO ROUND
SPONGE-DISPLAY
(22 1/2" x 20 3/16" x 23 5/8")

68995 120



Mixed Rounded Sponge-Display

- Sponges provides individually packed and with cardboard display. Polyurethane sponges.
- Mixed models : heavy duty grouting and haze buffer sponges.

REF 

MIXED ROUND
SPONGE-DISPLAY
(22 1/2" x 20 3/16" x 23 5/8")

68996 120



Superpro Sponge

- Contains x135 units of ref. 20905.
- Dimensions: 23" x 15" x 47" (60 x 40 x 120 cm.).

REF 

SUPERPRO sponge palbox

69955 1



General Display Stand

- Trays and shelves are optional.

REF 

General display 40" (1000 mm.) 90811 1

General display 25" (650 mm.) 90812 1

Additional shelf for general display 40" 90570 1

Additional shelf for 25" general display 90571 1

Short hook for general display 90681 1

Set 2 display bars 90810 1

Cage general display 40" (1000 mm.) 90606 1

Cage general display 25" (650 mm.) 90607 1



Display for Manual Tile Cutters

- Capacity to display 3 manual tile cutters.

REF 

Display for manual cutters.

90305 1





CLUB RUBI APP

WWW.RUBI.COM



THE FIRST APP THAT GIVES YOU
REWARDS
FOR YOUR PURCHASES

The Club RUBI APP rewards your loyalty.
Discover all of the advantages!



EXTENDED WARRANTY




EXCLUSIVE PROMOTIONS



INCREASE YOUR POINTS



MULTIMEDIA CATALOGUE

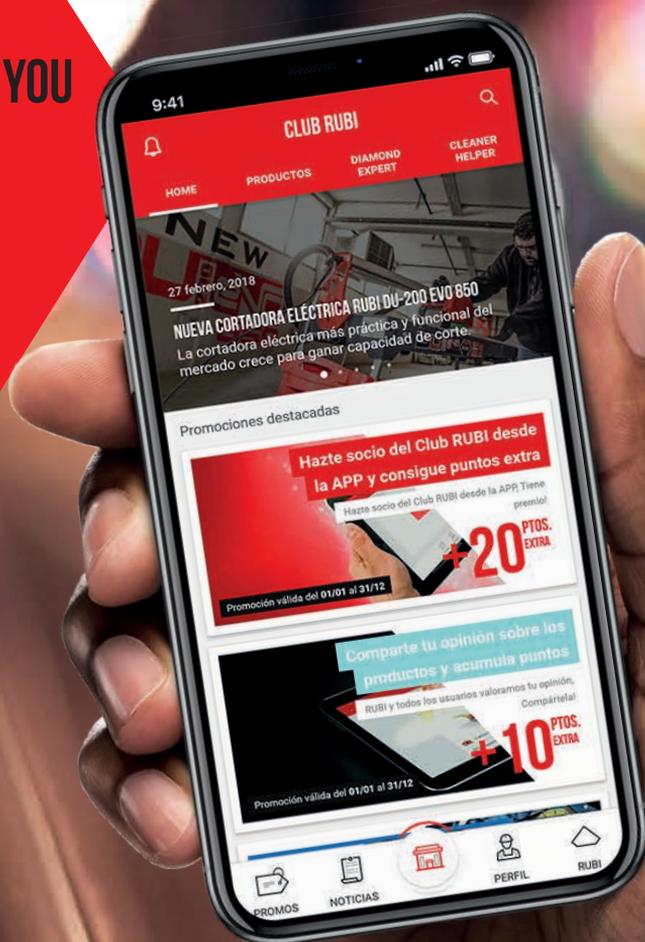

DOWNLOAD IT NOW
AND START ACCUMULATING POINTS

In this catalog to provide reader's maximum information as clearly as possible, we have used the following symbols.

SYMBOLGY									
	2+1 years warranty		Adjustable flow		Cut Length		Maximum drill length		Metallic
	2+3 years warranty		Smart Power		Tip-up table for mitring		Mixing capacity		Reinforced Handle
	2 year warranty		Soft		Stainless steel table		Regulable		Flexible
	Units per pallet		MAGNET		INCH/MM. ruler		Max Height of the head		Comfort
	Units per box		Cutting height		Tip-up table for mitring		Rod's head diametre		Spout to prevent spillages
	Net weight without packaging		Separator power		Repetitive cuts		Wide notched trowel		UV Ray Resistant
	Gross weight		Fixed separator		Foldable head		Notched height trowel		Reinforced
	With carrying case		Mobile separator		Angular measurement		Notched Radius Trowel		Strong
	Weight with carrying case		Repetitive cuts		Plunge Effect		Trowel length		Embossed Scale
	Power supply		45° cuts		Folding legs		Trowel width		Smokeless
RPM	Revolutions per minute		Base accessory		Mobile cart		Bags per box		Recycled Tyre Rubber
W	Watts		Angular measuring		Level		N° tile spacers per bag		Light
	Cutting length		Dual reinforced guide		Laser		Tile spacers for box		Antishock
	Diagonal cutting length		PURE POWER		Fast-in		Sponge size		Easy Use
	Cutting height		One Hand Action		Wet cutting		Absorption level (1-4)		Reduced dust and noise
	Separator power		Ergo Trolley Included		Dry cutting		Resistance to abrasion (1-4)		Easy Cleaning
	Mitre cutting length		Back Pack Optional		With blade		45°		Height of bucket
	Miter Thickness cut		Zero Dust		Outside diameter		Resistant to extreme temperatures		Bottom diameter
	Maximum cutting thickness - 1 stroke or 2 strokes		1 hour of continuous work maximum, recommended by TNO		Inside diameter		Hardness and Robustness		Top diameter
	Length Width Height (machine overall dimensions)		3 hours of continuous work maximum, recommended by TNO		Disc segment high		Recycled material		Useable height
	Wall chaser effect		Power		Segment Thickness		Easy		C3 system



Germans Boada SA and its subsidiaries comply with the Directive 2002/96/EC on waste electrical and/or electronic and Directive 2002/95/EC on the restriction of certain substances in their manufacture, applying the law of each member state according to EEC your specific criteria. (WEEE, WEEE, ECORAE, etc ...) (RoHS).

* The gross weight of some electrical machines can vary depending on the type of pallet and carton type used in packaging.

** Any manipulation of the machines voids the warranty. The warranty covers defects in manufacturing or assembly in accordance with applicable law.

Note: It is forbidden any reproduction of all or part of this catalog without prior approval of Germans Boada, SA

REF. 92541



8 413797 925418



Building Together

RUBI TOOLS USA Inc.

10813 NW 30th Street, Suite 110
DORAL, FLORIDA 33172 USA
P. 1 305 715 9892
F. 1 305 715 9898
rubitools.usa@rubi.com

HEAD QUARTERS

GERMANS BOADA S.A.

Pol. Can Rosés,
Avda. Olímpíades 89-91,
P.O. BOX 14
08191 RUBI
(Barcelona) SPAIN
T. 34 936 80 65 00
F. 34 936 80 65 01
gboada@rubi.com

PROUD
MEMBER
OF:



www.rubi.com

